



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : H04M 1/72, H04Q 7/32, H04L 12/28	A1	(11) International Publication Number: <b>WO 97/34403</b> (43) International Publication Date: 18 September 1997 (18.09.97)
---	----	--

(21) International Application Number: PCT/SE97/00366


(22) International Filing Date: 4 March 1997 (04.03.97)

(30) Priority Data:  
08/616,054 14 March 1996 (14.03.96) US(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON  
(PUBL) [SE/SE]; S-126 25 Stockholm (SE).(72) Inventor: JOHANSSON, Gårdenfors; Kornettsgatan 24 A, S-  
211 50 Malmö (SE).(74) Agents: BANDELIN, Hans et al.; Telefonaktiebolaget LM  
Ericsson, Patent and Trademark Dept., S-126 25 Stockholm  
(SE).(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,  
BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE,  
GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,  
LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ,  
PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT,  
UA, UG, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW,  
SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD,  
RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES,  
FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent  
(BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD,  
TG).**Published***With international search report.**Before the expiration of the time limit for amending the  
claims and to be republished in the event of the receipt of  
amendments.*

## (54) Title: AN INTEGRATED LOCAL COMMUNICATION SYSTEM

## (57) Abstract

An integrated local communication system (100) comprising a plurality of locally-positioned communication devices (110-1 - 110-N), at least one of which locally-positioned communication devices is operably coupled to a local interface module (120-1 - 120-N). A local communication link is selectively effectuated between any two locally-positioned communication devices (110-1 - 110-N) via at least one local interface module (120-1 - 120-N) by transforming a non-local communication signal into a local communication signal and transceiving the local communication signal using a single preselected communication protocol that is common to all local communication links. An exemplary embodiment (200) may include at least one mobile station associated with a Public Land Mobile Network, at least one radio-enhanced phone interfacing device (210) associated with a Public Switching Telephone Network (260), at least one electronic data terminal selectively disposed in a distributed computing environment, and at least one wireless headset for hands-free operability.

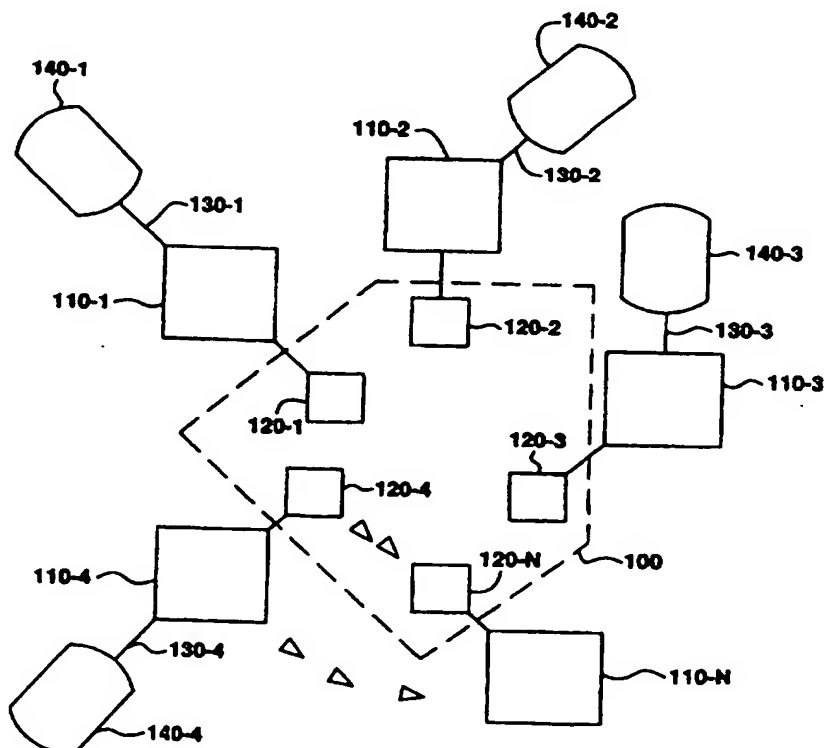

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MY	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## AN INTEGRATED LOCAL COMMUNICATION SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

5 This application hereby incorporates by reference the following co-assigned patent applications which describe related subject matter in greater detail: U.S. Patent Application Serial number 08/476,504, entitled "MODULAR UNIT HEADSET", filed June 7, 1995 (Docket No. 27946-00098; inventors: Nils Rutger Rydbeck and Per Stein); U.S. Patent Application Serial Number 08/471,606, entitled "ELECTRONIC EQUIPMENT AUDIO SYSTEM", filed June 6, 1995 (Docket No. 27946-00085); U.S. Patent Application Serial Number 08/577,086, entitled "IDENTIFICATION OF MOBILE CALLS WITHIN A MOBILE TELEPHONE SYSTEM", filed December 22, 1995 (Docket No. 27943-00033; inventor: Eric Valentine); and U.S. Patent Application Serial No. 08/353,966, entitled "MODULAR RADIO COMMUNICATIONS SYSTEM", filed December 12, 1994 (Docket No. 27946-00070; inventor: Per Stein).

20 BACKGROUND OF THE INVENTIONTechnical Field of the Invention

The present invention relates to communication systems and, more particularly, to an integrated local area communication system.

25 Description of Related Art

Recent advances in wireless telecommunications have been multi-faceted, resulting in a myriad of new products and services. In the mobile cellular telecommunications area, some of the new services include both private services usually provided within a home or business environment for private mobile subscribers and public services provided through a public land mobile network for public mobile subscribers. Both private and public mobile service may be provided on a cellular basis, with mobile subscribers being allowed to roam between the geographic coverage areas of different base stations of each of the private and public systems.

-2-

Private mobile service is typically provided through a private mobile telephony network that is implemented using a private cordless system standard such as the Cordless Telephone Standard 2 (CT-2). Private telephony systems may be provided as stand-alone networks or connected to a fixed telephony network.

Public mobile service is, on the other hand, generally provided through a cellular telecommunications network using one of the common cellular transmission standards such as the Advanced Mobile Phone Service (AMPS) System Standard, or the Global System for Mobile Communication (GSM) Standard.

Another direction in which there have been related developments is the area of cordless telephony products. Cordless telephone communications systems that are connected to a public switching telephone system (PSTN) have been known for some time. Cordless telephones operate utilizing a portable telephone unit in communication with a base station through a pair of radio frequency (RF) transceivers in the portable unit and in the base station. When the device is operable and a call is placed, dial tone and voice signals are transmitted from the RF transmitter in the portable unit to the RF receiver in the base station, and then over the PSTN lines in the ordinary manner. Similarly, when a call is received, the voice signals are transmitted from the RF transmitter in the base station to the RF receiver in the portable unit.

Although cordless telephones are convenient in that they allow telephone communication without the impaired-mobility imposed by a cord, they still require, like conventional corded telephones, usage of at least one hand to hold the portable unit for operating. Recent attempts that address the limitations of conventional cordless telephones have resulted in headset-like portable units that allow hands-free operation. In U.S. Pat. No. 4,882,745 to Silver, a "cordless headset telephone" is described in which only a single earphone is included to

-3-

cover one ear while leaving the other ear open. Another related device is disclosed in U.S. Pat. No. 4,741,030 to Wilson, wherein a cordless headset is provided with a dial board positioned near the microphone for easy viewing by the user. As in the Silver device, the Wilson device does not disclose the use of two earphones and a volume control to enhance sound quality and to block external ambient noise. Another cordless telephone headset using only a single earphone is disclosed in U.S. Pat. No. 4,484,029 to Kennedy.

A recent improvement over these above-mentioned cordless telephone headsets is described in U.S. Pat. No. 5,113,428, wherein the portable unit is totally contained in a headset having its own push button key pad, related control buttons, a rechargeable battery, an RF transceiver and two earphones with volume control.

A co-assigned pending U.S. Patent Application, entitled "MODULAR UNIT HEADSET", cross-referenced hereinabove and incorporated by reference herein, describes an integrated system wherein a host electronic system, coupled to a PSTN, is capable of communicating with a headset by both wireless and wired means due to a modular unit attached to it. In yet another co-assigned pending U.S. Patent Application, entitled "ELECTRONIC EQUIPMENT AUDIO SYSTEM", cross-referenced hereinabove and incorporated by reference herein, describes a module port having a module connector, that is capable of communicating with a microphone via wireless and wired means.

It is readily apparent that a logical progression of these multi-faceted advances is towards increased interoperability and modularized integration of multiple physical devices so as to enhance human operator convenience. For example, it would be an advantage to have a mobile station equipped with a modular unit that is capable of communicating with a cordless phone base station so that it can operate as an extension of the

- 4 -

cordless phone to effectuate landline communication. It would be of further advantage to have a wireless headset that is capable of communicating on a single protocol with both the mobile station and cordless phone base station.

5 In such a system, the human operator has the benefit of hands-free operation of multiple telecommunications devices without having to interchange different modular units. Additionally, it can be readily appreciated that it would be of significant advantage to inter-operably

10 integrate an electronic data terminal into such a local area communication system (LACS) whereby the utility of the terminal is further maximized. It is apparent that such an electronic data terminal can be a computer, which in turn may be stand-alone or in a Local Area Network, or

15 a telefax, a pager, a printer, or a hand-held data organizer. Further, integrating a conventional phone answering machine that is operable to play back an outgoing greeting or a recorded caller message and to record an in-coming message, into the LACS will undoubtedly

20 enhance operator convenience and the use of the device. The method and apparatus of the present invention and various components thereof provide such advantages.

## 25 SUMMARY OF THE INVENTION

In one aspect of a presently preferred exemplary embodiment, the present invention includes a local area communication system (LACS) comprising a plurality of locally-positioned communication devices, wherein any two

30 locally-positioned communication devices are selectably operable to communicate with each other over a preselected communication medium, and further wherein at least one of which may be associated with an external or non-local communications network. Each of the locally-positioned

35 communication devices is also provided with a corresponding local interface module wherein the local interface module is capable of receiving an incoming

-5-

communication signal and transforming it into a local transport signal suitable for local transmission in accordance with at least one preselected common protocol. According to a presently preferred embodiment of the present invention, either the incoming communication signal or the local transport signal may be either analog or digital, suitably modulated according to known methods. Furthermore, either of these signals may comprise voice, video, or data, or any combination thereof. It is further envisioned herein that the local interface module may be functionally and structurally integrated into the circuitry of the corresponding communication device. Or, in an alternative aspect, the local interface module may be a pluggable module adapted to be received in a module port formed in the corresponding communication device.

In a further aspect, the present invention includes at least one mobile station associated with a cellular mobile telecommunications network, at least one phone interfacing device (PID) associated with a public switching telephone network (PSTN), at least an electronic data terminal and at least one hands-free unit. It will be readily understood upon reference hereto by one skilled in the art that such an electronic data terminal may be a computer that is selectably connectable to a network, or a printer, or a pager or a telefax machine or a hand-held data organizer. Or, the electronic data terminal may simply be in a different aspect a phone answering machine. Further, it is contemplated herein that the computer may be a multimedia computer of the type having graphic, audio, video and data interfaces. In addition, the PID can be a radio-enhanced phone interfacing device or a conventional corded phone having a handset connected by wire means to the cradle unit. Each of these devices is coupled to a corresponding local interface module which comprises a transceiver that is capable of selectably effectuating a local communication link between the local interface module of which it is a part and any other local

-6-

interface module. The radio-enhanced phone interfacing device may be a conventional cordless phone base unit coupled with a local interface module, or alternatively, a local interface module directly-connectable to the PSTN with enhanced functionality, referred to herein and hereby as a home base station. Also, the home base station may be, in one embodiment, be equipped with a set of key pads to facilitate call initiation. In yet another aspect, the local interface module comprises an infra-red transceiver for selectably effectuating local communication links. Alternatively, it is contemplated herein that it is within the scope of the present invention to include a transceiver for effectuating local communication using other media, including but not limited to, electromagnetic waves, or optic waves, or microwaves or magnetic waves.

Accordingly, it is an object of the present invention to provide a LACS wherein there is further provided a mobile station that is selectably operable as a cordless phone handset to place or receive calls over the PSTN. It is a further object to provide a wireless headset that is selectably operable either as a wireless extension to a mobile station or as a hands-free remote unit in connection with a radio-enhanced phone interfacing unit associated with the PSTN. It is yet another object of the present invention to inter-operably integrate an electronic data terminal, such as one described hereinabove, into the LACS of the present invention. It is a still further object of the present invention to provide two headsets, preferably wireless, that can engage using a common protocol in a local communication link between themselves and with a locally-positioned communication device other than a headset.

#### BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the method and apparatus of the present invention may be had by reference



-7-

to the following detailed description when taken in conjunction with the accompanying drawings wherein:

FIGURE 1 is a block diagram of the broad network interconnection of an integrated local area communication system comprising a plurality of communication devices;

FIGURE 2 is a block diagram of an integrated local communication system in accordance with a presently preferred exemplary embodiment of the present invention;

FIGURE 3 is a block diagram of the implementation of a local area communication system in accordance with an aspect of a presently preferred exemplary embodiment of the present invention;

FIGURE 4 illustrates a network interconnection of multiple Public Land Mobile Networks (PLMNs) to a Public Switching Telephone Network (PSTN);

FIGURE 5 is a block diagram of a PLMN;

FIGURE 6 is a block diagram of a conventional land-line telephone unit;

FIGURE 7 is a block diagram of a conventional cordless phone base unit;

FIGURE 8 illustrates a block diagram of a conventional wireless headset unit;

FIGURE 9A depicts a block diagram of a presently preferred embodiment of a local interface module adapted for use with a mobile station in accordance with the present invention;

FIGURE 9B is a block diagram of a presently preferred embodiment of a home base station or directly-connectable local interface module adapted for use with a PSTN in accordance with the present invention;

FIGURE 9C is a block diagram of a presently preferred embodiment of a local interface module adapted for use with a serial computer port connector in accordance with the present invention;

FIGURE 9D is a block diagram of a presently preferred embodiment of a local interface module adapted for use

- 8 -

with an electronic data terminal in accordance with the present invention;

FIGURE 9E is a block diagram of a presently preferred embodiment of a local interface module adapted for use with a cordless phone base unit associated with a PSTN in accordance with the present invention;

FIGURE 10 shows an exemplary decision tree that may be used in accordance with the present invention to selectably effectuate local wireless communication for incoming calls; and

FIGURE 11A and FIGURE 11B show an exemplary decision tree that may be used in accordance with the present invention to selectably effectuate local wireless communication for call initiation.

#### DETAILED DESCRIPTION OF THE DRAWINGS

FIG. 1 depicts the broad network interconnection of an integrated local area communication system (LACS) according to the present invention, generally denoted by reference numeral 100. The local communication system 100 envisions seamless integration of a plurality of electronic communications devices, 110-1 through 110-N, at least one of which may be connected to an external communication network, shown herein by reference numerals 140-1 through 140-4. The connections, 130-1 through 130-4, between the plurality of devices 110-1 through 110-4 and the external communications systems 140-1 through 140-4, may be wireless or wire-line, according to the present invention.

Still referring to FIG. 1, a plurality of local interface modules, 120-1 through 120-N, are shown as connected to the plurality of devices 110-1 through 110-N. According to a presently preferred exemplary embodiment of the present invention, each of the plurality of local interface modules 120-1 through 120-N is capable of effectuating wireless communication with the other N-1 local interface modules. According to the present

- 9 -

invention, the local communication can be voice, video and data, or any combination thereof. Further, the local communication is effectuated upon a single communication protocol involving a local medium which can be electro-magnetic waves such as radio, infra-red, optic spectra or microwaves, or magnetic waves, or wire-line. The local signal may be analog or digital, with any suitable modulation known in the art.

FIG. 2 illustrates a block diagram of a presently preferred exemplary embodiment of the present invention, generally denoted by reference numeral 200. Reference numeral 210 refers to a radio-enhanced phone interfacing device, coupled to a public switching telephone network (PSTN) 260. In one aspect of the invention, the radio-enhanced phone interfacing device 210 can be simply a known cordless phone base unit capable of short-range wireless communication in a home or office environment.

Continuing with FIG. 2, reference numeral 240 refers to a known mobile station associated with a Public Land Mobile Network (PLMN) 270. Reference numeral 230 refers to an electronic data terminal, as referenced and described hereinabove, that may be associated with a local area network (LAN) 280. It will be understood by the persons of ordinary skill in the art upon reference hereto that there are many known variations and modifications of the electronic data terminal 230. For instance, it can be a computer that is selectably associated within a distributed computing environment. Alternatively, it can also be a printer, or a telefax machine, or a pager, or a phone answering machine, or a hand-held data organizer. It is within the spirit of the present invention that these known variations and modifications of the electronic data terminal 230 are capable of being arranged in a local communication network in accordance with the present invention.

Still referring to FIG. 2, reference numeral 220 refers to a wireless headset, provided in a presently

-10-

preferred exemplary embodiment to maximize user convenience in effectuating a local communication path. Reference numerals 250-1 through 250-4 refer to four local interface modules. The local interface module 250-1 is coupled to the radio-enhanced phone interfacing device 210, the local interface module 250-2 is coupled to the wireless headset 220, the local interface module 250-3 is coupled to the electronic data terminal 230 and the local interface module 250-4 is coupled to the mobile station 240. It will be appreciated by the persons of ordinary skill in the art that although the local interface modules 250-1 through 250-4 are shown as separate functional blocks, they are capable of being integrated structurally into their respective communication devices 210, 220, 230 and 240. Furthermore, the radio-enhanced phone interfacing device 210 may be such that its associated local interface module 250-1 is functionally integrated into its native circuitry as well. Similarly, the wireless headset 220 and the local interface module 250-2 can be, in one aspect of the invention, functionally integrated also.

Referring now to FIG. 3, therein is shown an implementation of a local area communication system in accordance with an aspect of a presently preferred exemplary embodiment of the present invention. Reference numeral 210 is the radio-enhanced phone interfacing device that is associated with the PSTN 260 for external land-line communication. Reference numeral 261 is the associative path between the PSTN 260 and the radio-enhanced phone interfacing device 210. The communication signals on this path 261 may be analog or digital, and further, it may in a specific embodiment be a T1 phone line, or an Integrated Services Digital Network (ISDN) connection, or a high-capacity Asymmetric Digital Subscriber Line (ADSL). The radio-enhanced phone interfacing device 210, which is shown to have a local antenna 211 for local communication, may be a cordless phone base unit coupled with a corresponding local

-11-

interface module (not shown) or a directly-connectable home base station.

5 The mobile station 240 is associated with the PLMN 270 for cellular communication. The cellular path 271 may be effectuated between the mobile station 240 and the PLMN 270 using any one of the common cellular transmission standards such as the Advanced Mobile station Service (AMPS) System standard or the Global System for Mobile Communication (GSM) Standard. The mobile station 240 is  
10 equipped with a non-local antenna 242 to facilitate transmission and reception of cellular communication signals between the mobile station 240 and a base station (not shown). In addition, the mobile station 240 is coupled to a local interface module 241 having a local  
15 antenna 243 for local communication. The coupling between the mobile station 240 and the local interface module 241 is such that the non-local cellular communication signals over the cellular path 271 are selectably convertible to local communication signals, and vice versa, to be  
20 transmitted on a local communication link as will be discussed hereinbelow.

The wireless headset 220 is operable either as a wireless extension to the mobile station 240 via a first local radio communication link 310 or as a hands-free  
25 phone unit for communication over the PSTN 260 via a second local radio communication link 320. A third local radio communication link 330 is selectably established between the mobile station 240 and the radio-enhanced phone interfacing device 210 whereby the mobile station  
30 240 is selectably operable as a hands-on phone unit associated with the radio-enhanced phone interfacing device 210 to place a call over the PSTN 260.

Referring to FIG. 4, reference numeral 410 generally illustrates a possible network interconnection of multiple  
35 PLMNs 270A, 270B to PSTN 260, according to an aspect of the presently preferred exemplary embodiment of the present invention. A mobile subscriber (MS) 420 is

-12-

associated with one of the PLMNs as its Home PLMN 270A. Within each PLMN 270A, 270B, there are multiple mobile switching centers (MSCs) 470A, 470B, servicing the geographical areas covered by the network. The mobile subscriber 420 who is served by its Home PLMN 270A is capable of communicating with other wireless and wire-line terminals by connecting with the PSTN 260 through a Gateway Mobile Switching Center (GMSC) 430A. An access tandem (AT) 440 associated within the PSTN 260 routes the mobile calls generated from the PLMN 270A to wire-line terminals serviced by one of its exchanges within the PSTN 260, or to another PLMN 270B by way of its GMSC 430B. If the mobile subscriber 420 travels outside the coverage area of its Home PLMN 270A and roams into the geographical area covered by an adjacent PLMN 270B, an interexchange handoff occurs between the Home PLMN 270A and the adjacent PLMN 270B whereby telecommunications service continues to be provided to the MS 420 from the adjacent PLMN 270B as a roaming subscriber.

FIG. 5 is a block diagram of the PLMN 270 including the mobile switching center 470. In addition, the PLMN 270 comprises a Home Location Register (HLR) 480, a Visitor Location Register (VLR) 490 and a number of antenna systems 500-1 through 500-M. The mobile switching center 470 is also generally known in the art as a base station system, and includes a base-station controller 510 and one or more of base-station transceiver stations (BS) 520-1 through 520-L. Each of the base-station transceiver stations is associated with a subgroup of the antenna systems 500-1 through 500-M. In order for the mobile subscriber 420 to be allocated to a home network, an entry in the HLR 480 is made. Whenever the MS 420 is switched on, and possibly at regular intervals thereafter, it will register with the PLMN 270 and give its location area.

The MSC 470 communicates directly with the HLR 480 and the VLR 490 for subscriber information and transfers calls from one BS to another as the MS 420 travels within

-13-

the geographical area covered by the PLMN 270. Further, the GMSC 430 acts as a gateway to allow access to other wire-line terminals associated with the PSTN 260 or wireless mobile subscribers associated with other PLMNs.

5       The establishment of a cellular call within and without the PLMN 270 is typically effectuated via Signaling System No. 7 (SS7) network protocols utilizing network addresses. A co-assigned pending U.S. Patent Application, "IDENTIFICATION OF MOBILE CALLS WITHIN A  
10       MOBILE TELEPHONE SYSTEM", filed December 22, 1995, cross-referenced hereinabove and incorporated by reference herein, describes a method and system for utilizing network addresses to construct a unique call identifier for a cellular call.

15       Referring now to FIG. 6, a block diagram of a conventional landline telephone is shown generally at 610. This telephone 610 consists of a cradle 635 and a handset 645. The telephone 610 is connected to the PSTN 260 by a wire-line connection 615 which carry analog or digital  
20       telephone signals. It can be readily appreciated that the wire-line connection 615 can be substantially identical to the associative path 261 shown in FIG. 3 and described hereinabove. The cradle 635 includes Data Access Arrangement (DAA) section 620, key pad 625, and ringer  
25       circuit 630. On the other hand, the handset 645 includes speaker 640 and microphone 650. The DAA 620 contains analog filters and other known protection devices required to connect to the PSTN 260. The key pad 625 is used to provide the number to be called to the PSTN 260. Ringer  
30       circuit 630 and known associated signaling means are provided to inform the user when there is an incoming call.

FIG. 7 illustrates a block diagram of a conventional cordless phone base unit, generally shown at 710, which  
35       can be operable, for instance, at frequencies close to or within the 46 MHZ to 49 MHZ frequency range. The cordless phone base unit 710, conceptually, is a subminiature

-14-

cellular system providing at least a signaling channel which transmits outbound signals in a fashion similar to a conventional cellular outbound signaling channel, and receives service requests from a remote hand-held unit  
5 715.

The base unit 710 has a local PSTN line interface 720, a remote unit interface 730 coupled to an antenna 770, a channel switch 740, a tone signal source 750 generating tone signals such as a ringing tone signal, and  
10 a controller 760. The channel switch 740 selectively makes a channel between the local PSTN line interface 720 and the remote unit interface 730, and a channel between the tone signal source 750 and the remote unit interface 730. It is known in the art that the local PSTN line interface  
15 720 may comprise a hook circuit (not shown) performing an open/close control of a loop, a call detection circuit (not shown) for detecting a call signal and a sender (not shown) for sending dialing push-button signals. It is also well known in the art that the remote unit interface 730  
20 comprises a voice-band processing circuit (not shown), a mixer (not shown), a radio transceiver (not shown) coupled to the antenna 770. The controller 760 controls the local PSTN line interface 720, the channel switch 740, and the remote unit interface 730.

Referring now to FIG. 8, reference numeral 810  
25 generally shows a block diagram of a wireless headset according to an aspect of the present invention. An antenna 820, operable to receive and transmit local communication signals which may be effectuated using  
30 either standard wireless communication protocols or a proprietary protocol, is electrically connected to a radio transceiver 830. As is well known in the art, the functionality of the radio transceiver 830 may be implemented in numerous known ways, with attendant  
35 electronic circuitry for tuning etc.

Continuing with FIG. 8, the signal output from the radio transceiver 830 is then fed into a baseband



-15-

modulator/demodulator block 840 which either extracts the information signal from the local carrier radio wave or modulates the local carrier radio wave using the information signal. The in-coming information signal is then fed into a speaker 880 via a driver/amplifier block 850. It is well known in the art that the speaker 880 and the driver/amplifier block 850, in physical implementation, may take a variety of known forms. The out-going information signal is generated by a microphone 870 which is amplified by the driver/amplifier block 850. The amplified out-going information signal is then modulated with a local carrier radio wave for local transmission over a local medium. A controller block 860 is preferably provided which is in circuit communication with the radio transceiver 830, the baseband modulator/demodulator 840 and the driver/amplifier 850, in order to supervise the bi-directional transfer of the information signals. In one aspect of the present invention, the controller block 860 may comprise a microprocessor, a plurality of control switches, memory and/or hard-wired digital logic. In yet another aspect of the present invention, the implementation of the wireless headset may include a single housing with its own push button key pad and related control buttons, and a portable power source such as a rechargeable battery. In an additional aspect, the wireless headset may include two earphones, a swing-out microphone, flexibly mounted to the housing, a volume control for enhanced realistic binaural sound, and a supplementary head strap for securing the unit to the user's head. Further, the antenna 820 may preferably be disposed within the swing-out arm provided for the microphone 870, although in still another aspect of the invention, it may be coupled to one of the earphones such that it is extendable from the housing of the earphone. Moreover, in lieu of a conventional on/off switch, there may preferably be provided a voice-activated mechanism to facilitate connection/disconnection of a

-16-

local communication link with the headset. Additionally, the earphones may preferably be formed of a resilient rubber or plastic material to securely engage the user's ear and minimize the reception of external background noise. Alternatively, the earphones may be cupped cushions for foam cushions similar to high fidelity earphones in order to further reduce ambient background noise. Furthermore, it should be understood upon reference hereto that the aesthetic aspects of the wireless headset may in turn give rise to certain design features as well.

FIG. 9A is a block diagram of a presently preferred exemplary embodiment of a local interface module adapted for use with the mobile station 240 (not shown) that is associated with the PLMN 270 (not shown). FIG. 9B is a block diagram of a presently preferred exemplary embodiment of a local interface module adapted as a directly-connectable home base station associated with the PSTN 260. FIG. 9C is a block diagram of a presently preferred exemplary embodiment of a local interface module adapted for use with a serial computer port connector. FIG. 9D is a block diagram of a presently preferred exemplary embodiment of a local interface module adapted for use with the electronic data terminal 230. FIG. 9E is a block diagram of a presently preferred exemplary embodiment of a local interface module adapted for use with the cordless phone base unit 210 associated with the PSTN 260.

Referring now specifically to the local interface modules, 905-A to 905-E of FIGS. 9A to 9E, respectively, it can be readily appreciated that according to a presently preferred exemplary embodiment of the present invention, the local interface modules are substantially identical to one another, and to a great extent, are similar to the wireless headset, shown in FIG. 8. As described hereinabove, the antenna 820 is operable to receive and transmit local communication signals which may

-17-

be effectuated using either standard wireless communication protocols or a proprietary protocol, on a single local communication medium which can be an electromagnetic wave, an infra-red wave, a radio wave, a microwave, a magnetic wave, an optic wave or even a wire-line connection. The modulation and demodulation of the communication signal is achieved by the baseband modulator/demodulator 830 which is coupled to an interface circuitry block, 910-A through 910-E. The interface circuitry block 910-A effectuates appropriate conversion of communication signals between the local interface module 905-A and a system connector 920 coupled to the mobile station 240(not shown). The interface circuitry block 910-B effectuates appropriate conversion of communication signals between the directly-connectable local interface module 905-B (or, home base station, as has been described hereinabove) and the PSTN 260. The interface circuitry block 910-C effectuates appropriate conversion of communication signals between the local interface module 905-C and a serial port connector 930. In one aspect of the present invention, the serial port connector 930 may preferably be an RS-232 type connector. Alternatively, the interface circuitry block 910-C may be of PCMCIA-Standard-compatible, as described in a co-assigned pending U.S. Patent Application, Serial Number 08/353,966, cross-referenced hereinabove and incorporated by reference herein. The interface circuitry block 910-D effectuates appropriate conversion of communication signals between the local interface module 905-D and the electronic data terminal 935. The interface circuitry block 910-E effectuates appropriate conversion of communication signals between the local interface module 905-E and the cordless phone base unit 210 that is associated with the PSTN 260.

According to a presently preferred embodiment of the present invention, each of the local interface modules 905-A to 905-E may preferably be disposed within the

-18-

housing of the communication device (not shown) with which it is to interface. Alternatively, the local interface module may also be disposed in a separate housing such that it forms a pluggable unit to be received in a module port in the communication device. As mentioned hereinabove, the controller module 860 in FIGS. 9A to 9E is substantially similar to the controller module 860 in FIG. 8.

FIGS. 10, 11A and 11B show two flowcharts illustrating an exemplary decision tree that may be used according to the teachings of the present invention in order to effectuate local wireless communication among at least a radio-enhanced phone interface device, a mobile station and a wireless headset. Since maximization of user convenience and flexibility is a desired object of the present invention, different decision trees may be employed to suit different conditions of operation.

Referring now specifically to FIG. 10, therein is shown a flowchart for selectably effectuating local wireless communication links for call reception. Steps 1005 and 1020 are decision blocks to determine if the incoming call is a PSTN call or if it is a cellular call over the PLMN. If the call is a PSTN call then the user needs to determine if the mobile station or the headset is to be used to function as the call terminating device. This step is provided in the decision block 1010. If the mobile station is present within the geographic area of coverage provided for the radio transceiver unit of the local interface module attached to the radio-enhanced phone interface device and the user selects to use the mobile station to receive the PSTN call, the user takes the MS path 1011. Upon making that determination, the user can selectably establish a wireless local communication link between the mobile station and the radio-enhanced phone interface device as shown at 1015. On the other hand, if the mobile station is out of range for use with the radio-enhanced phone interface device, or if the user

-19-

desires to use the wireless headset to receive the incoming PSTN call, the user takes the Headset path 1013 to selectably establish in step 1017 a local wireless communication link between the wireless headset and the radio-enhanced phone interface device. Further, if the wireless headset is out of range, or if the user does not desire to use the wireless headset, then the user may proceed as in step 1016 to receive the PSTN call by using the conventional wireless, or corded, handset by taking the path shown at 1012.

If the incoming call is a cellular call, as determined by step 1020, then the user has a choice of using the mobile station in a conventional manner to receive that call, shown in step 1035, or establish a wireless local communication link between the mobile station and the wireless headset, provided they are within a suitable range from each other, as shown in step 1040.

Referring now to FIGS. 11A and 11B, therein is shown an exemplary decision tree for initiating a call according to the teachings of an aspect of the present invention. Decision blocks 1105 and 1125 are employed to determine whether the outgoing call is to be transmitted over the PLMN or the PSTN. If the outgoing call is a PSTN call, the user takes the YES path shown at 1104. After this step, the user has the choice of call initiation by using a wireless headset with keypads, or by using a mobile station as shown in the decision block 1110. If the user desires to use the mobile station and if the mobile station is within the local range of the radio-enhanced phone interface device, the user may by taking the MS path 1113 selectably establish the local communication link between the mobile station and the radio-enhanced phone interface device as shown in 1121. If the user desires, on the other hand, to use the headset by taking the Headset path 1111, subsequent steps of the decision tree are dependent on whether the wireless headset is equipped with its own key pad necessary for remote operation. This

-20-

condition is tested in the decision block 1115. If the determination is NO, the user takes the path 1116 to initiate the PSTN call using the key pads associated with the radio-enhanced phone interfacing device as shown in  
5 step 1117. Afterwards, the user can return via path 1118 to using the wireless headset as in step 1119 which is also reached if the user takes the YES path 1114 from the decision block 1115. Alternatively, if neither the mobile station nor the wireless headset is selected by the user,  
10 then call initiation over the PSTN will proceed by using a conventional handset, if provided with the radio-enhanced phone interface device, shown in step 1120.

Similarly, if the outgoing call is a cellular call as determined in 1125, the user then has the choice of  
15 using either the headset, or the mobile station. If either the headset is not in a suitable range, or if the headset is not equipped with a key pad, then the user initiates the cellular call using the mobile station as shown in step 1165 which is reached via either 1141 or 1136. After  
20 initiating the cellular call using the mobile station, the user has the option of returning to using the headset via a return path 1172, or continue using the mobile station as shown in 1175. Also, by taking the YES step 1142 from the decision block 1140, the user may selectably establish  
25 a local communication link between the headset and the mobile station as shown in 1160. Although presently preferred exemplary embodiments of the method and apparatus of the present invention have been illustrated in the accompanying Drawings and described in the  
30 foregoing Detailed Description, it will be understood that the invention is not limited to the embodiments disclosed, but is capable of numerous rearrangements, modifications and substitutions without departing from the spirit of the invention as set forth and defined by the following  
35 claims. For example, it will be readily appreciated that the local communication paths may also comprise infra-red (IR) or microwave or magnetic wave links and the

-21-

corresponding receivers/transmitters will be used in lieu of radio transceivers. Additionally, the term "radio transceiver" as used herein comprises appropriate radio control logic of the type necessary to constitute a radio device that is capable of communicating using a wireless communication standard such as DAMPS, GSM, DECT etc. The transceiver may include, in addition to a transmitter and receiver, data modem circuitry, when the communications device is used for data transmission. Further, both local and non-local (that is, disposed between the plurality of communications devices and their respective external communications networks) communications signals may be analog or digital, and may comprise voice, video and data. Accordingly, it will be readily appreciated by the persons of ordinary skill in the art upon reference hereto that the exemplary modifications and substitutions mentioned hereinabove do not depart from the spirit of the present invention, directed to a local area communication system (LACS) capable of effectuating a local communication path among a plurality of communications devices using a single local communication medium.

-22-

## WHAT IS CLAIMED IS:

1. A circuit assembly for effectuating a communication link between a first locally-positioned communication device and an external communication system of which a second locally-positioned communication device forms a portion, the first locally-positioned communication device and the second locally-positioned communication device together positioned within a local area, said circuit assembly comprising:
- 10 a first local interface module operably coupled to the first locally-positioned communication device, said first local interface module at least for transmitting, within at least the local area, a local transport-send signal generated by the first locally-positioned communication device;
- 15 a second local interface module operably coupled to the second locally-positioned communication device, said second local interface module at least for receiving the local transport-send signal transmitted by said first local interface module and for providing the local transport-send signal to the second locally-positioned communication device, thereby to effectuate the communication link with the external communication system of which the second locally-positioned communication device forms the portion.
- 20 2. The circuit assembly of claim 1 wherein the communication link comprises a two-way communication link, said second local interface module further for transmitting a local transport-receive signal provided to said second local interface module by the second locally-positioned communication device, and said first local interface module further for receiving the local transport receive signal.
- 25 3. The circuit assembly of claim 1 wherein the first communication device comprises a mobile station,
- 30
- 35



-23-

said first local interface module being operably coupled thereto.

5           4.   The circuit assembly of claim 1 wherein the first communication device comprises a cordless phone base station, said first local interface module being operably coupled thereto.

10           5.   The circuit assembly of claim 1 wherein said first local interface module and the first communication device are integrated into a single network interface device, said single network interface device comprising a home base station.

15           6.   The circuit assembly of claim 1 wherein the first communication device comprises a corded phone, said first local interface module being operably coupled thereto.

20           7.   The circuit assembly of claim 1 wherein the first communication device comprises a headset, said first local interface module being operably coupled thereto.

25           8.   The circuit assembly of claim 1 wherein the first communication device comprises an electronic data terminal, said first local interface module being operably coupled thereto.

30           9.   The circuit assembly of claim 1 wherein the second communication device comprises a mobile station, said second local interface module being operably coupled thereto.

35           10.   The circuit assembly of claim 1 wherein the second communication device comprises a cordless phone base station, said second local interface module being operably coupled thereto.

-24-

11. The circuit assembly of claim 1 wherein said second local interface module and the second communication device are integrated into a single network interface device, said single network interface device comprising  
5 a home base station.

12. The circuit assembly of claim 1 wherein the second communication device comprises a corded phone, said second local interface module being operably coupled  
10 thereto.

13. The circuit assembly of claim 1 wherein the second communication device comprises a headset, said second local interface module being operably coupled  
15 thereto.

14. The circuit assembly of claim 1 wherein the second communication device comprises an electronic data terminal, said second local interface module being  
20 operably coupled thereto.

15. The circuit assembly of claim 8 wherein said electronic data terminal is associated with a local area network.  
25

16. The circuit assembly of claim 8 wherein said electronic data terminal is associated with a wide area network.

17. The circuit assembly of claim 8 wherein said electronic data terminal comprises a multimedia computer of the type including at least one of an audio interface, a video interface and a graphics interface.  
30

18. The circuit assembly of claim 14 wherein said electronic data terminal is associated with a local area network.  
35

-25-

19. The circuit assembly of claim 14 wherein said electronic data terminal is associated with a wide area network.

5       20. The circuit assembly of claim 14 wherein said electronic data terminal comprises a multimedia computer of the type including at least one of an audio interface, a video interface and a graphics interface.

10       21. The circuit assembly of claim 7 being adapted for a user wherein said headset comprises a wireless headset, said wireless headset being adapted to be positioned about the user's head.

15       22. The circuit assembly of claim 13 being adapted for a user wherein said headset comprises a wireless headset, said wireless headset being adapted to be positioned about the user's head.

20       23. The circuit assembly of claim 21 wherein said wireless headset further comprises:

          a housing for attachment to the user's head;  
          a transceiver disposed in said housing for  
receiving and transmitting local communication signals;  
25       an antenna coupled to said transceiver;  
          a controller for controlling said transceiver,  
said controller operably connected to said transceiver;  
          at least one earphone having a speaker, said at  
least one earphone attached to said housing;  
30       a microphone attached to said housing;  
          a power source contained within said housing;  
and

          an amplifier contained within said housing, said  
amplifier operably connected to said transceiver for  
35       amplifying local communication signals received by said  
transceiver.

-26-

24. The circuit assembly of claim 22 wherein said wireless headset further comprises:

- a housing for attachment to the user's head;
- a transceiver disposed in said housing for
- 5 receiving and transmitting local communication signals;
- an antenna coupled to said transceiver;
- a controller for controlling said transceiver,
- said controller operably connected to said transceiver;
- at least one earphone having a speaker, said at
- 10 least one earphone attached to said housing;
- a microphone attached to said housing;
- a power source contained within said housing;
- and
- an amplifier contained within said housing, said
- 15 amplifier operably connected to said transceiver for
- amplifying local communication signals received by said
- transceiver.

25. The circuit assembly of claim 2 wherein said

20 first local interface module further comprises:

- a transceiver for receiving the local transport-
- receive signal and transmitting the local transport-send
- signal;
- a baseband modulator and demodulator for
- 25 modulating and demodulating the local transport-receive
- signal and the local transport-send signal, said baseband
- modulator and demodulator operably coupled to said
- transceiver; and
- a controller, said controller generating control
- 30 information, said controller being operably coupled to
- said transceiver and said baseband modulator and
- demodulator.

26. The circuit assembly of claim 2 wherein said

35 second local interface module further comprises:

-27-

a transceiver for receiving the local transport-receive signal and transmitting the local transport-send signal;

5 a baseband modulator and demodulator for modulating and demodulating the local transport-receive signal and the local transport-send signal, said baseband modulator and demodulator operably coupled to said transceiver; and

10 a controller, said controller generating control information, said controller being operably coupled to said transceiver and said baseband modulator and demodulator.

15 27. The circuit assembly of claim 2 wherein said two-way communication link is effectuated upon a radio wave medium.

20 28. The circuit assembly of claim 2 wherein said two-way communication link is effectuated upon an infra-red wave medium.

25 29. The circuit assembly of claim 2 wherein said two-way communication link is effectuated upon a magnetic medium.

30 30. The circuit assembly of claim 2 wherein said two-way communication link is effectuated upon at least one wire.

35 31. The circuit assembly of claim 2 wherein said two-way communication link is effectuated upon an electromagnetic wave medium.

32. The circuit assembly of claim 2 wherein said two-way communication link is effectuated upon at least one of a microwave medium and an optic wave medium.

-28-

33. The circuit assembly of claim 2 wherein said two-way communication link is effectuated using a single local communication protocol.

5           34. A method for effectuating a communication link between a first locally-positioned communication device and an external communication system of which a second locally-positioned communication device forms a portion, the first locally-positioned communication device and the  
10           second locally-positioned communication device together positioned within a local area, said method comprising the steps of:

                  coupling a first local interface module to the first locally-positioned communication device, said first  
15           local interface module at least for transmitting, within the local area, a local transport-send signal generated by the first locally-positioned communication device;

                  coupling a second local interface module to the second locally-positioned communication device, said  
20           second local interface module at least for receiving the local transport-send signal transmitted by the first locally-positioned communication device; and

                  providing the local transport-send signal to the second locally-positioned communication device, thereby  
25           establishing the communication link with the external communication system of which the second locally-positioned communication device forms the portion.

30           35. In a local communication system having a plurality of locally-positioned communication devices, an improvement of circuitry for selectably effectuating a local communication link between any two locally-positioned communication devices, said circuitry comprising:

35           at least one local interface module operably coupled to at least one of the locally-positioned communication devices, said at least one local interface

-29-

5 module for selectably forming a local communication link established between any two locally-positioned communication devices, said any two locally-positioned communication devices being selected from the plurality of locally-positioned communication devices.

10 36. The circuitry of claim 35 wherein the plurality of locally-positioned communication devices includes a mobile station, and wherein said at least one local interface module is operably coupled to said mobile station.

15 37. The circuitry of claim 35 wherein the plurality of communication devices includes a cordless phone base unit, and wherein said at least one local interface module is operably coupled to said cordless phone base unit.

20 38. The circuitry of claim 35 being adapted for direct use with a public switching telephone network, wherein the plurality of communication devices includes a home base station, said home base station comprising said at least one local interface module, said at least one local interface module being of the type including network-interface circuitry internally thereto.

25 39. The circuitry of claim 35 wherein the plurality of locally-positioned communication devices includes a corded phone, and wherein said at least one local interface module is operably coupled to said corded phone.

30 40. The circuitry of claim 35 wherein the plurality of locally-positioned communication devices includes an electronic data terminal, and wherein said at least one local interface module is operably coupled to said electronic data terminal.

-30-

41. The circuitry of claim 40 wherein said electronic data terminal is associated with a local area network.

5           42. The circuitry of claim 40 wherein said electronic data terminal is associated with a wide area network.

10           43. The circuitry of claim 40 wherein said electronic data terminal comprises a multimedia computer of the type including at least one of an audio interface, a video interface and a graphics interface.

15           44. The circuitry of claim 35 being adapted for a user wherein the plurality of locally-positioned communication devices includes a wireless headset, said wireless headset being adapted to be positioned about the user's head, and further wherein said at least one interface module is operably coupled to said wireless headset.

20           45. The circuitry of claim 44 wherein said wireless headset further comprises:

25               a housing for attachment to the user's head;  
              a transceiver disposed in said housing for receiving and transmitting local communication signals;  
              an antenna coupled to said transceiver;  
              a controller for controlling said transceiver, said controller operably connected to said transceiver;  
30               at least one earphone having a speaker, said at least one earphone attached to said housing;  
              a microphone attached to said housing;  
              a power source contained within said housing;  
              and  
35               an amplifier contained within said housing, said amplifier operably connected to said transceiver for



-31-

amplifying local communication signals received by said transceiver.

5        46. The circuitry of claim 35 wherein said local communication link formed by said at least one interface module is effectuated using a single local communication protocol.

10       47. The circuitry of claim 35 wherein said at least one interface module further comprises:

        a transceiver for receiving and transmitting a local communication signal;

        a baseband modulator and demodulator for modulating and demodulating said local communication signal, said baseband modulator and demodulator operably coupled to said transceiver; and

        a controller, said controller generating control information, said controller operably coupled to said transceiver and said baseband modulator and demodulator.

20       48. The circuitry of claim 35 wherein said local communication link is effectuated on at least one of an electro-magnetic wave medium, a microwave medium, a magnetic medium, a radio wave medium, an infra-red wave medium, an optic wave medium and a wire-line medium.

30       49. In a local area communication system including a radio-enhanced phone interfacing device of the type having one of a cordless phone base unit or a home base station, the radio-enhanced phone interfacing device being connected to a public switching telephone network, a headset for receiving and transmitting communication signals and a mobile station associated with a mobile cellular telecommunication system, a local communication interface system comprising:

-32-

a first local communication interface unit, said first unit being operably associated with the cordless phone base unit;

5 a second local communication interface unit, said second unit being operably associated with the headset;

a third local communication interface unit, said third unit being operably associated with said mobile station; and

10 means for establishing a common protocol for the mobile station to be selectably operable for communicating with at least one of the headset and the radio-enhanced phone interfacing unit.

15 50. The local communication interface system of claim 49 wherein at least one of said first local communication interface unit, said second local communication interface unit and said third local communication interface unit further comprises:

20 a transceiver for receiving and transmitting a local communication signal;

a baseband modulator/demodulator for modulating and demodulating said local communication signal, said baseband modulator/demodulator operably coupled to said transceiver; and

25 a controller, said controller generating control information, said controller operably coupled to said transceiver and said baseband modulator/demodulator.

30 51. The local communication interface system of claim 49 wherein at least one of the radio-enhanced phone interfacing unit and the headset comprises a plurality of dial buttons.

35 52. The local communication interface system of claim 49 wherein said first local communication interface unit and the cordless phone base unit are integrated into

-33-

a single network interface device, said single network interface device comprising the home base station.

53. The local communication interface system of claim 49 being adapted for a user wherein the headset comprises a wireless headset, said wireless headset being operably coupled to said second local interface communication interface unit, and further wherein said wireless headset is adapted to be positioned about the user's head.

54. The local area communication system of claim 53 wherein said wireless headset further comprises:

- a housing for attachment to the user's head;
- a transceiver disposed in said housing for receiving and transmitting local communication signals;
- an antenna coupled to said transceiver;
- a controller, said controller controlling said transceiver;
- at least one earphone having a speaker, said at least one earphone attached to said housing;
- a microphone attached to said housing;
- a power source contained within said housing;

and

- an amplifier contained within said housing, operably connected to said transceiver for amplifying local communication signals received by said transceiver.

55. A method for establishing communication over a wireless local communication system having a mobile station associated with a mobile cellular telecommunication network, a radio-enhanced base station associated with a landline public switching telephone network, a wireless headset capable of communicating with at least one of said mobile station and said radio-enhanced base station, each of said mobile station, said radio-enhanced base station and said wireless headset

-34-

being coupled to a separate local interface module, said method comprising the steps of:

5       determining if said mobile station is within a first transmission range associated with said radio-enhanced base station;

10       selectably establishing a first local wireless path between said mobile station and said radio-enhanced base station if said mobile station is within a first transmission range associated with said radio-enhanced base station;

      otherwise determining if said mobile station is within a second transmission range associated with said wireless headset;

15       selectably establishing a second local wireless path between said wireless headset and said mobile station if said mobile station is within a second transmission range associated with said wireless headset;


20       otherwise determining if said wireless headset is within said first transmission range associated with said radio-enhanced base station;

25       selectably establishing a third local wireless path between said wireless headset and said radio-enhanced base station if said wireless headset is within said first transmission range associated with said radio-enhanced base station,

30       wherein each of said first local wireless path, said second local wireless path and said third local wireless path is effectuated on a common local communication protocol.


1 / 1 6

FIG.1

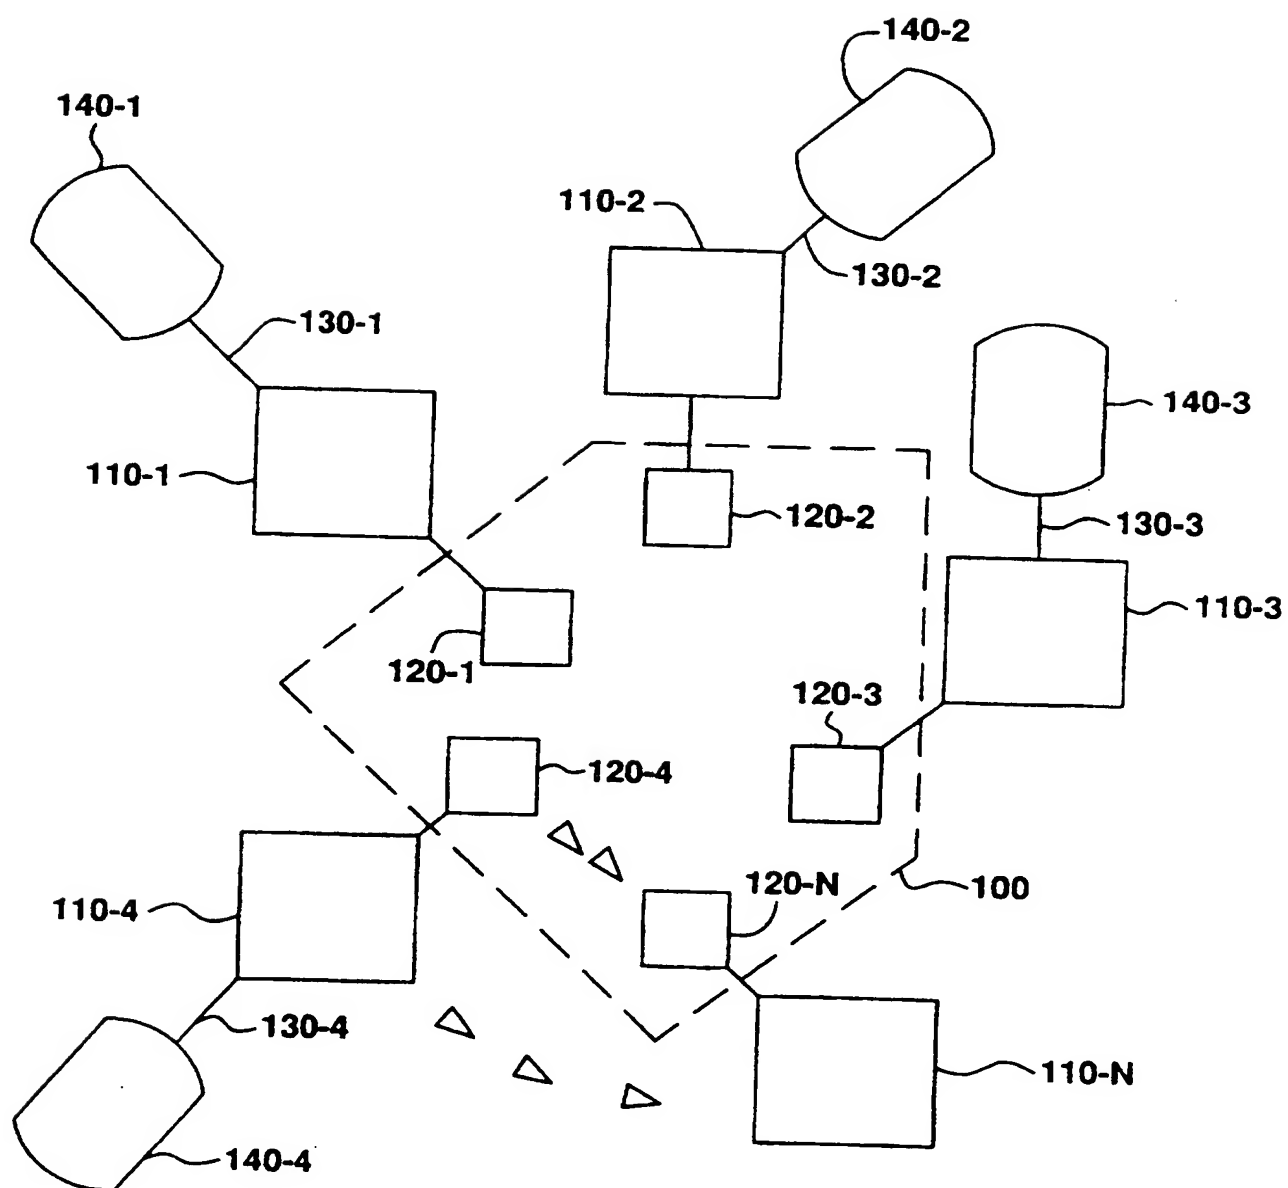


2 / 1 6

FIG.2

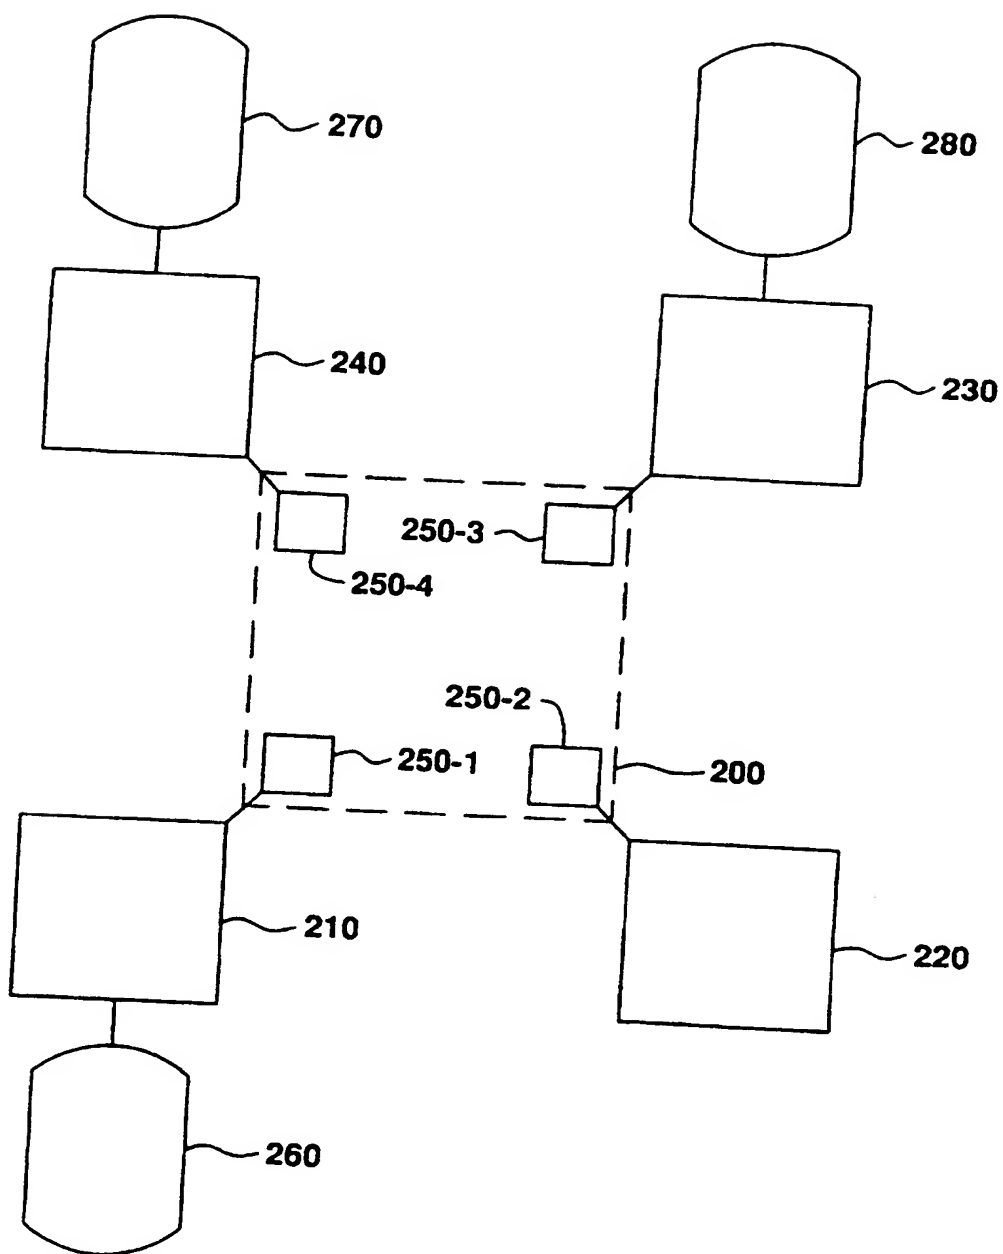


3 / 1 6

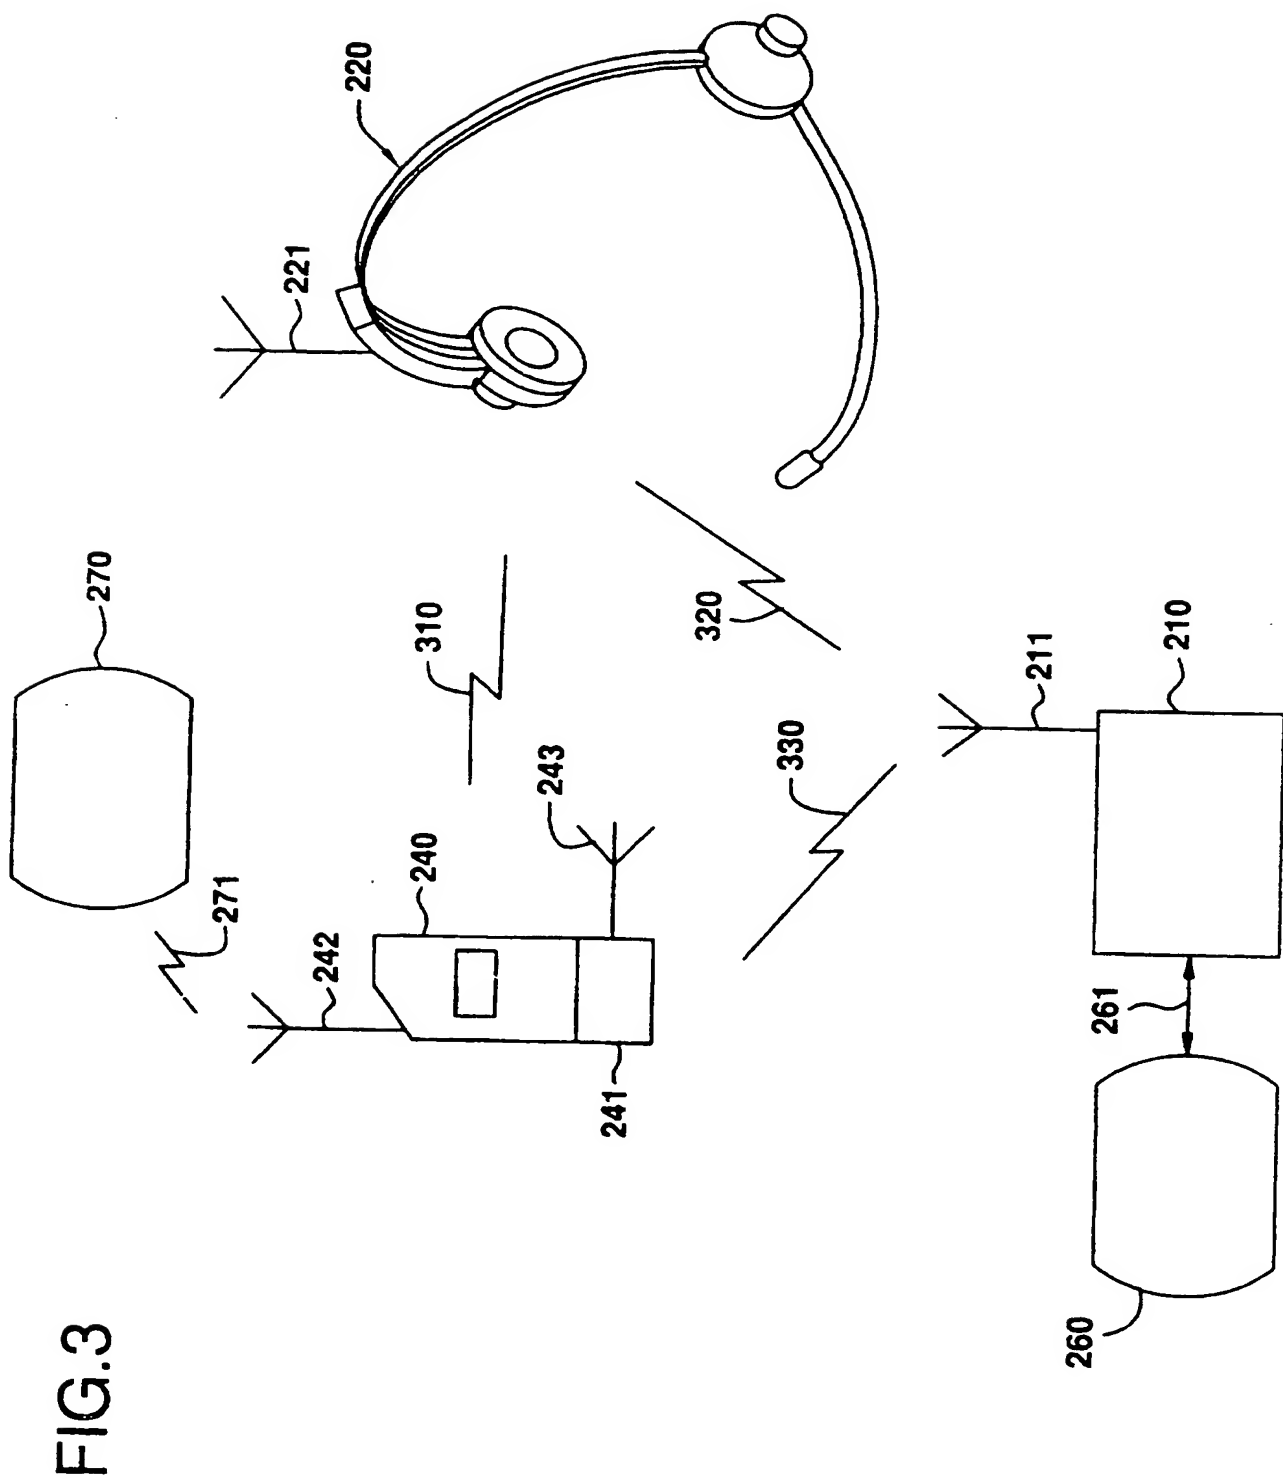

4 / 1 6

FIG.4

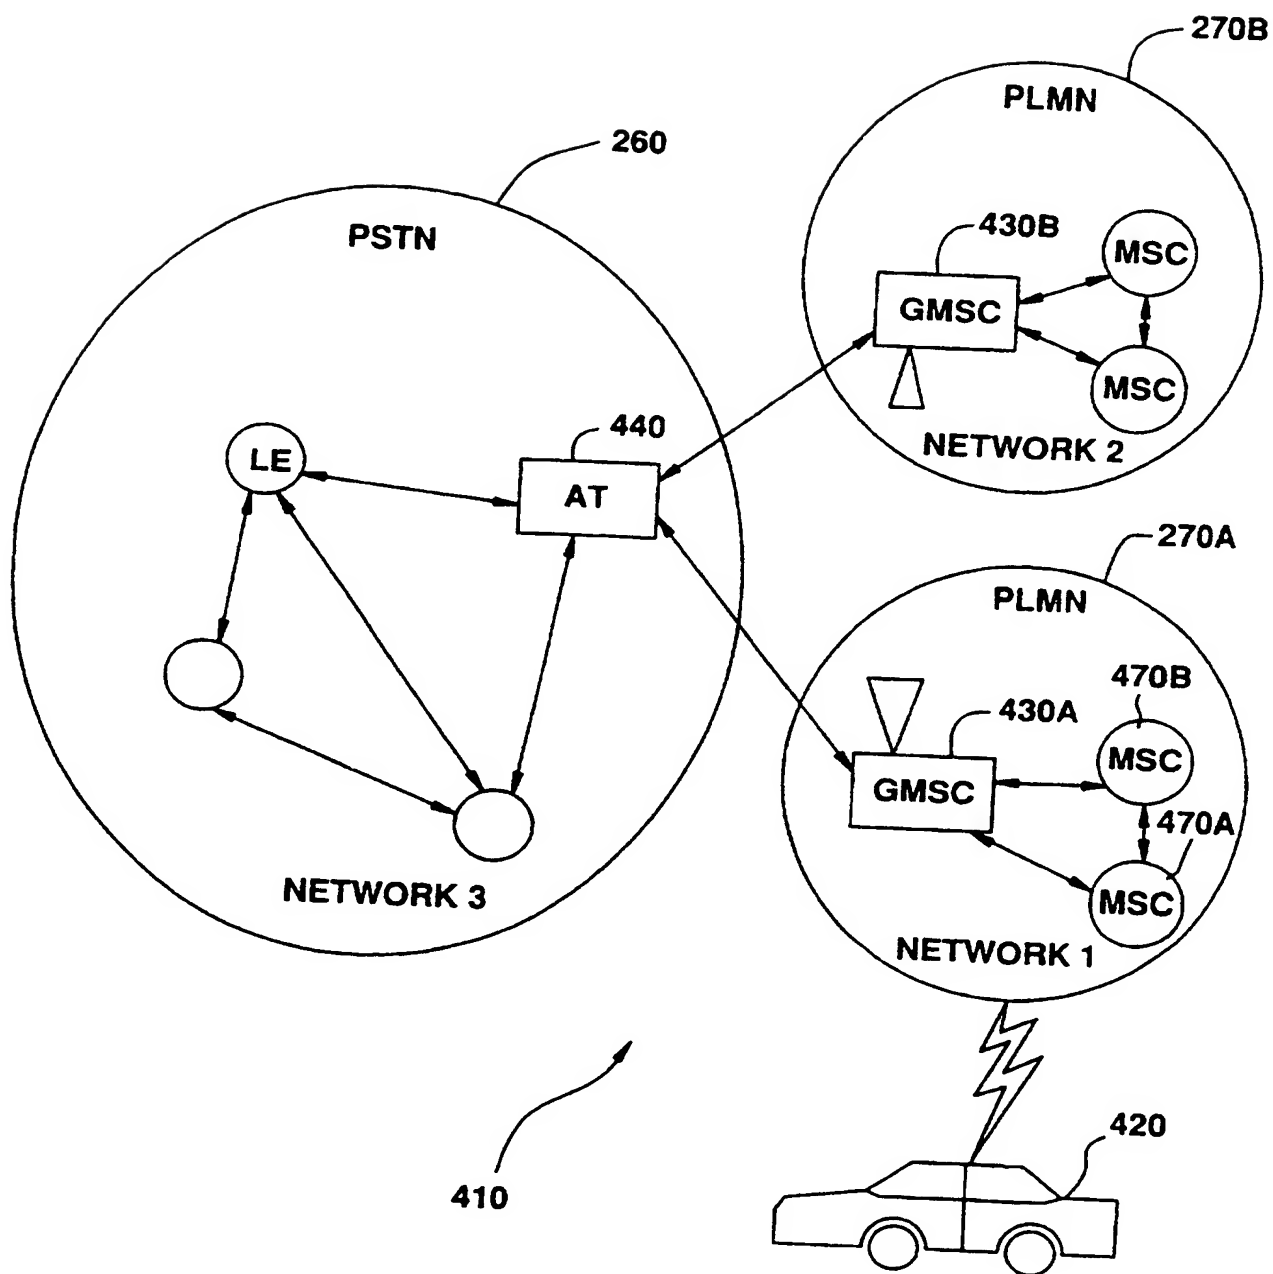




5 / 1 6  
FIG.5

FIG.6







FIG. 7



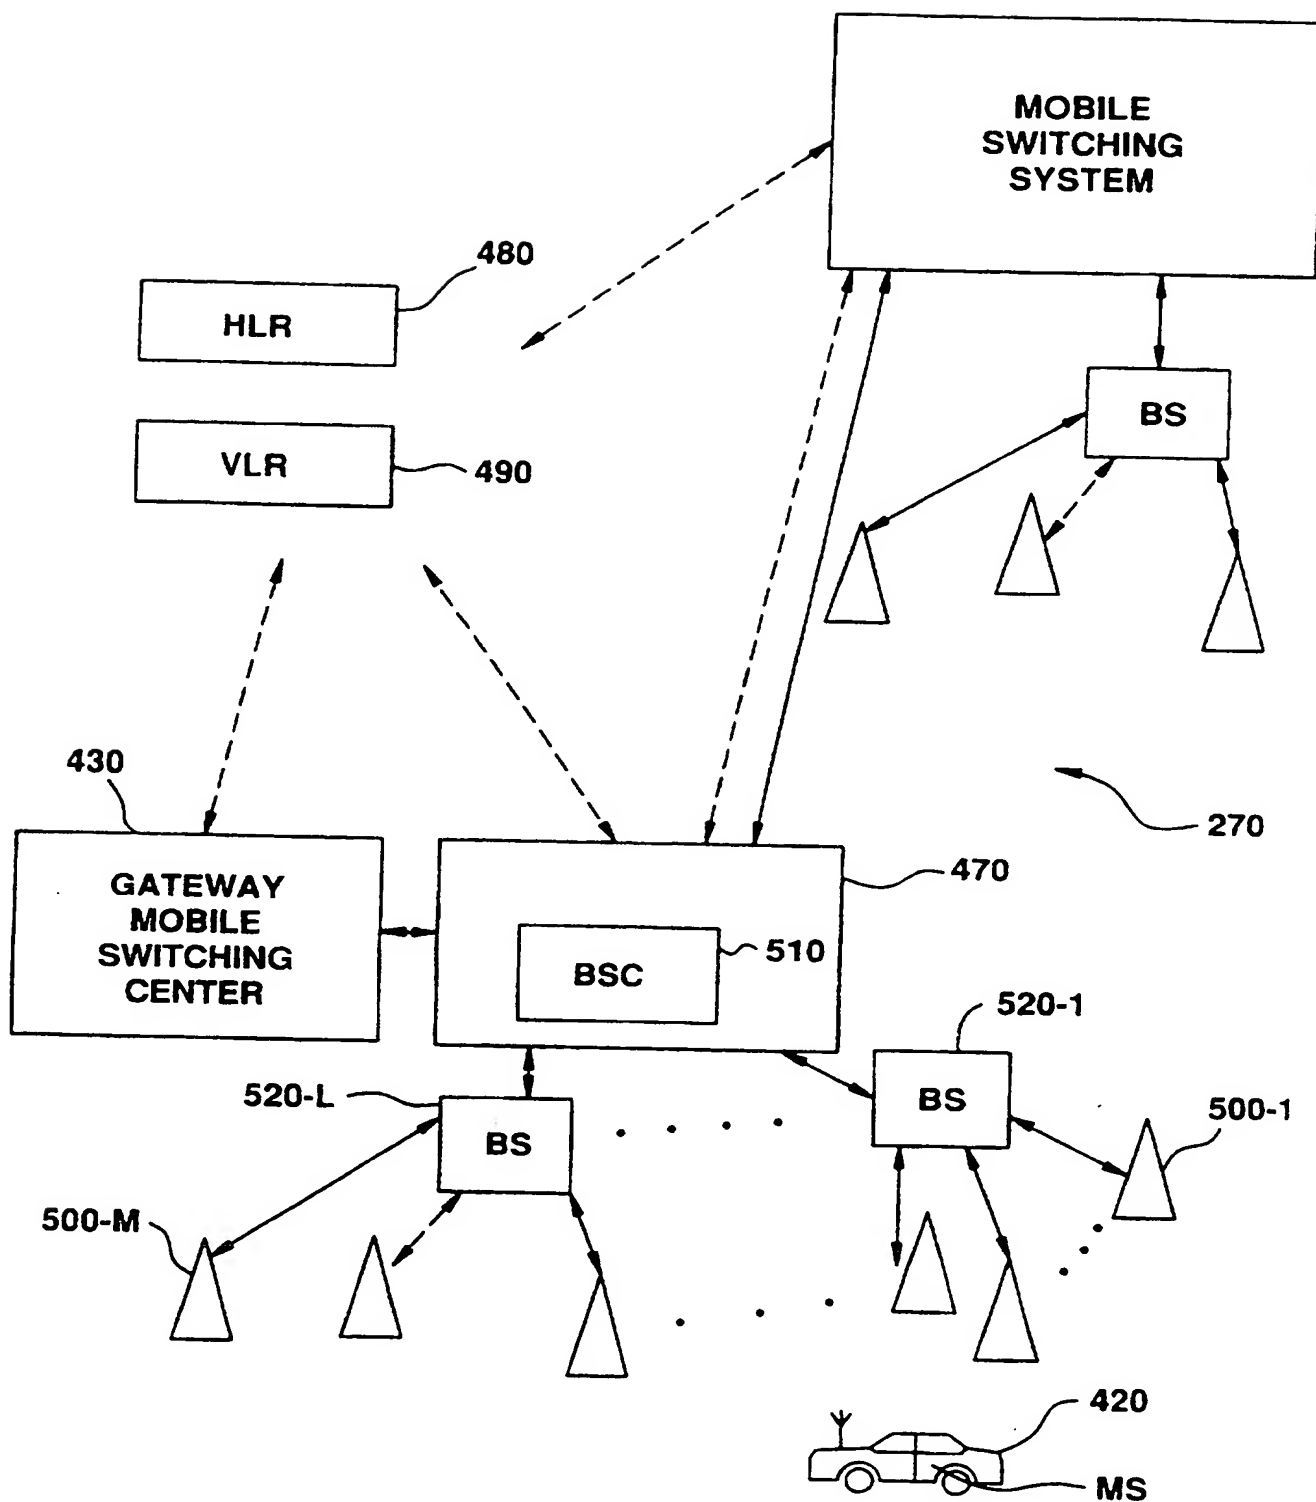


9 / 16

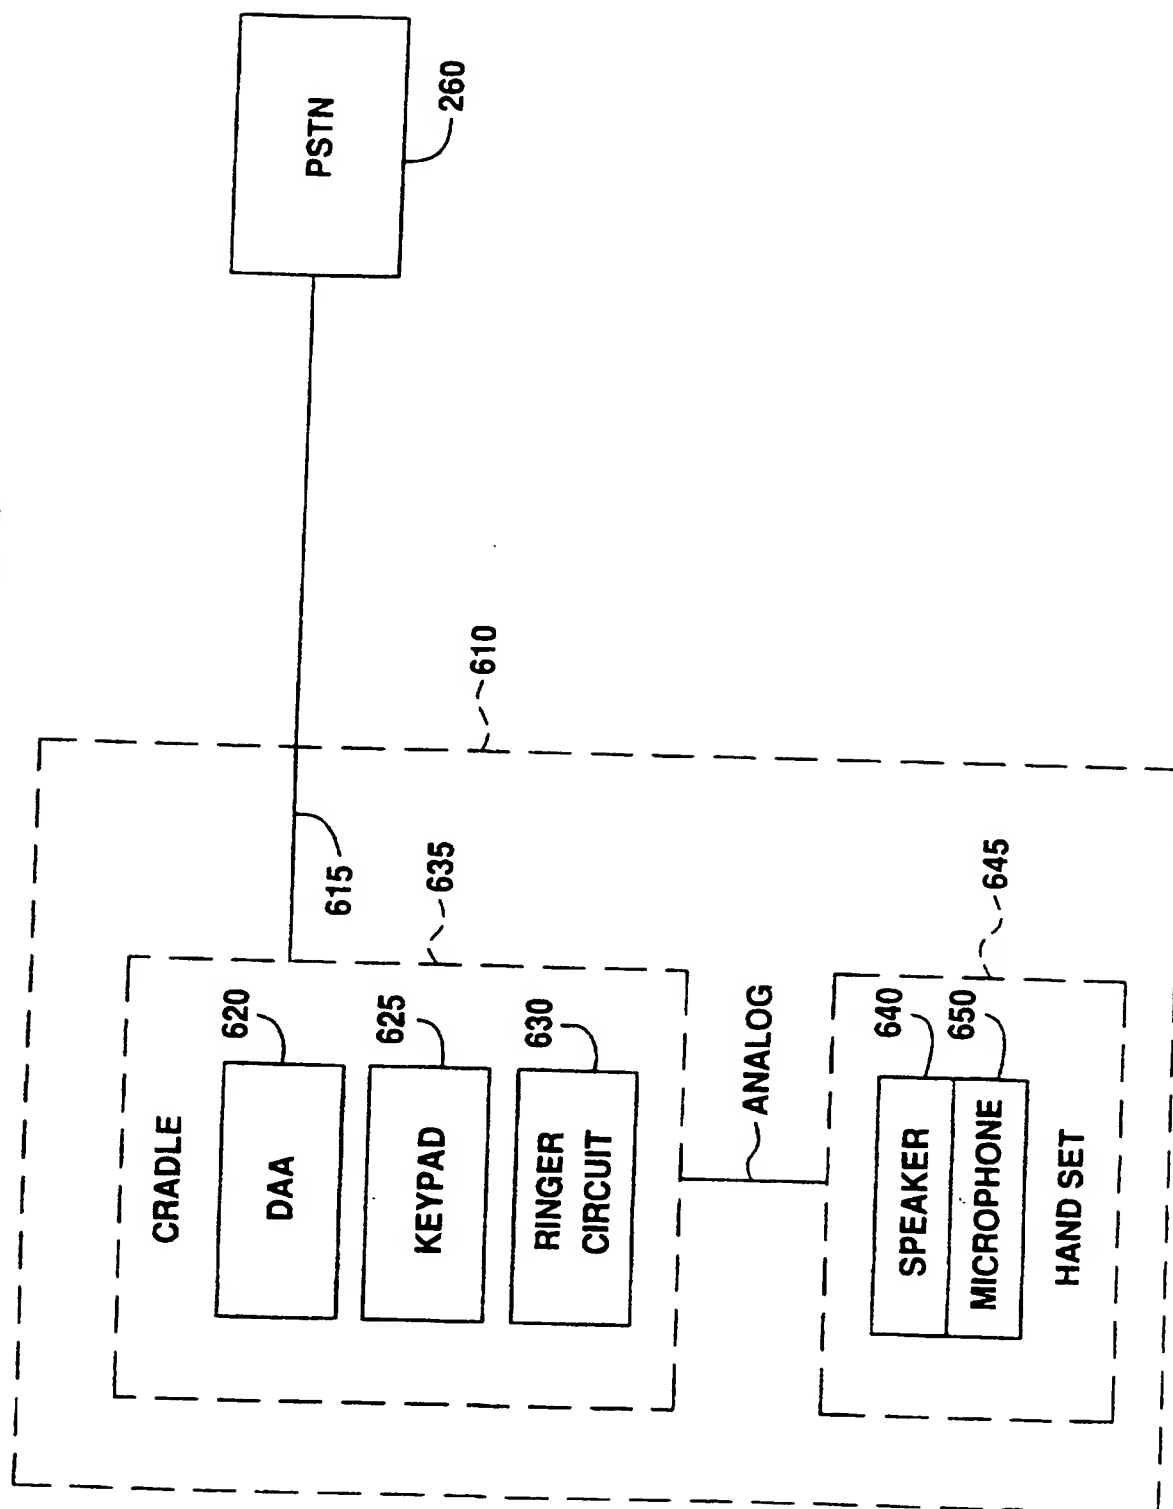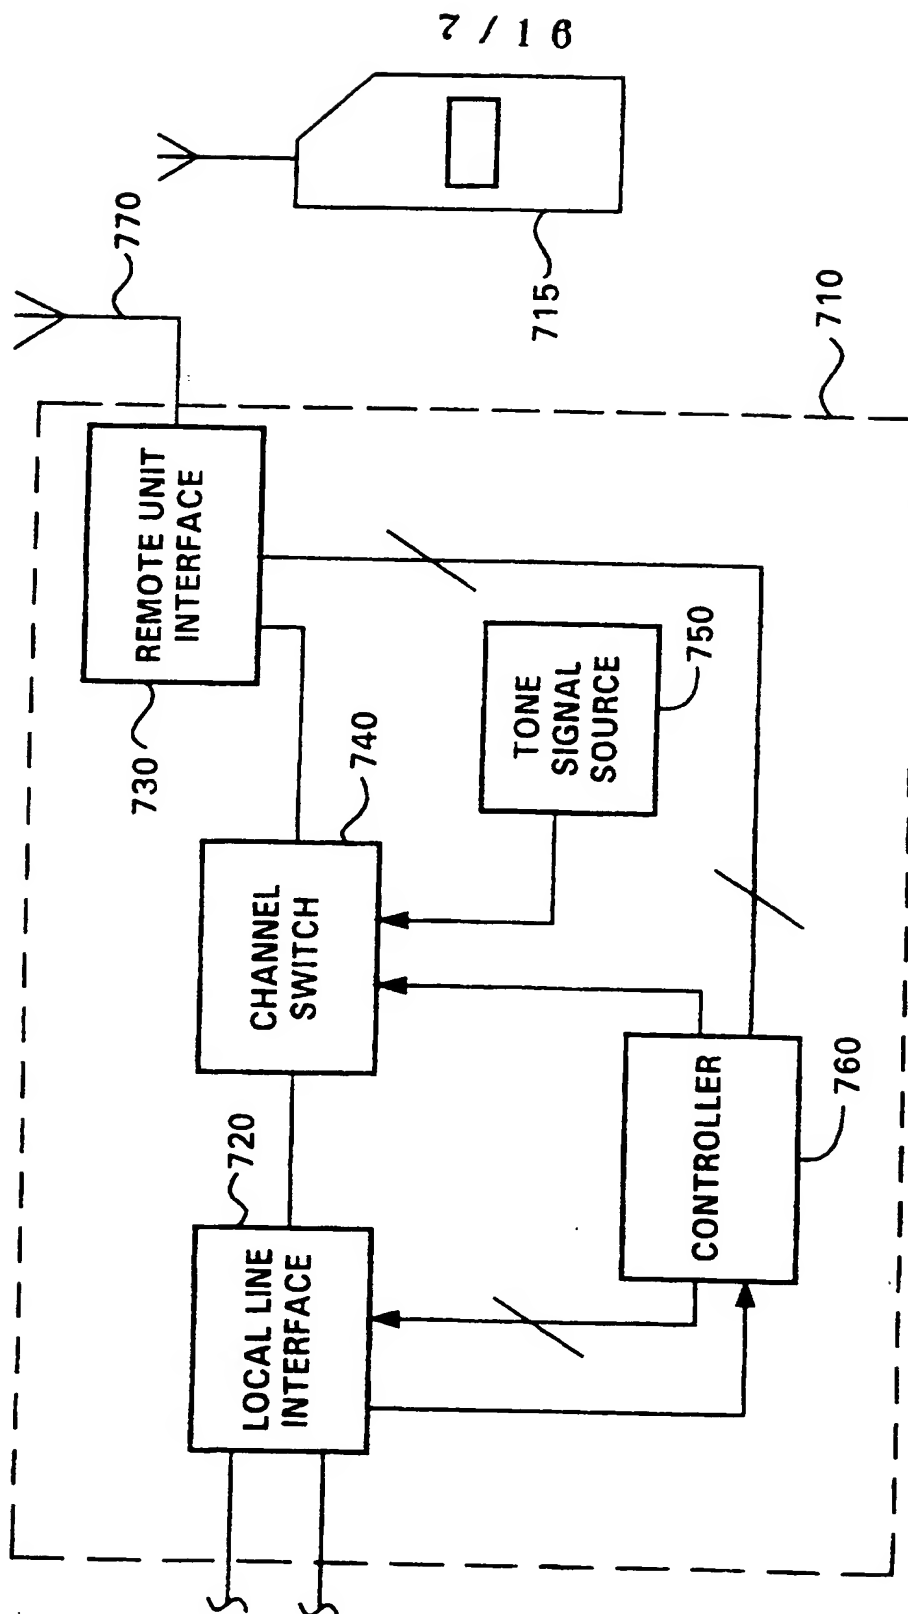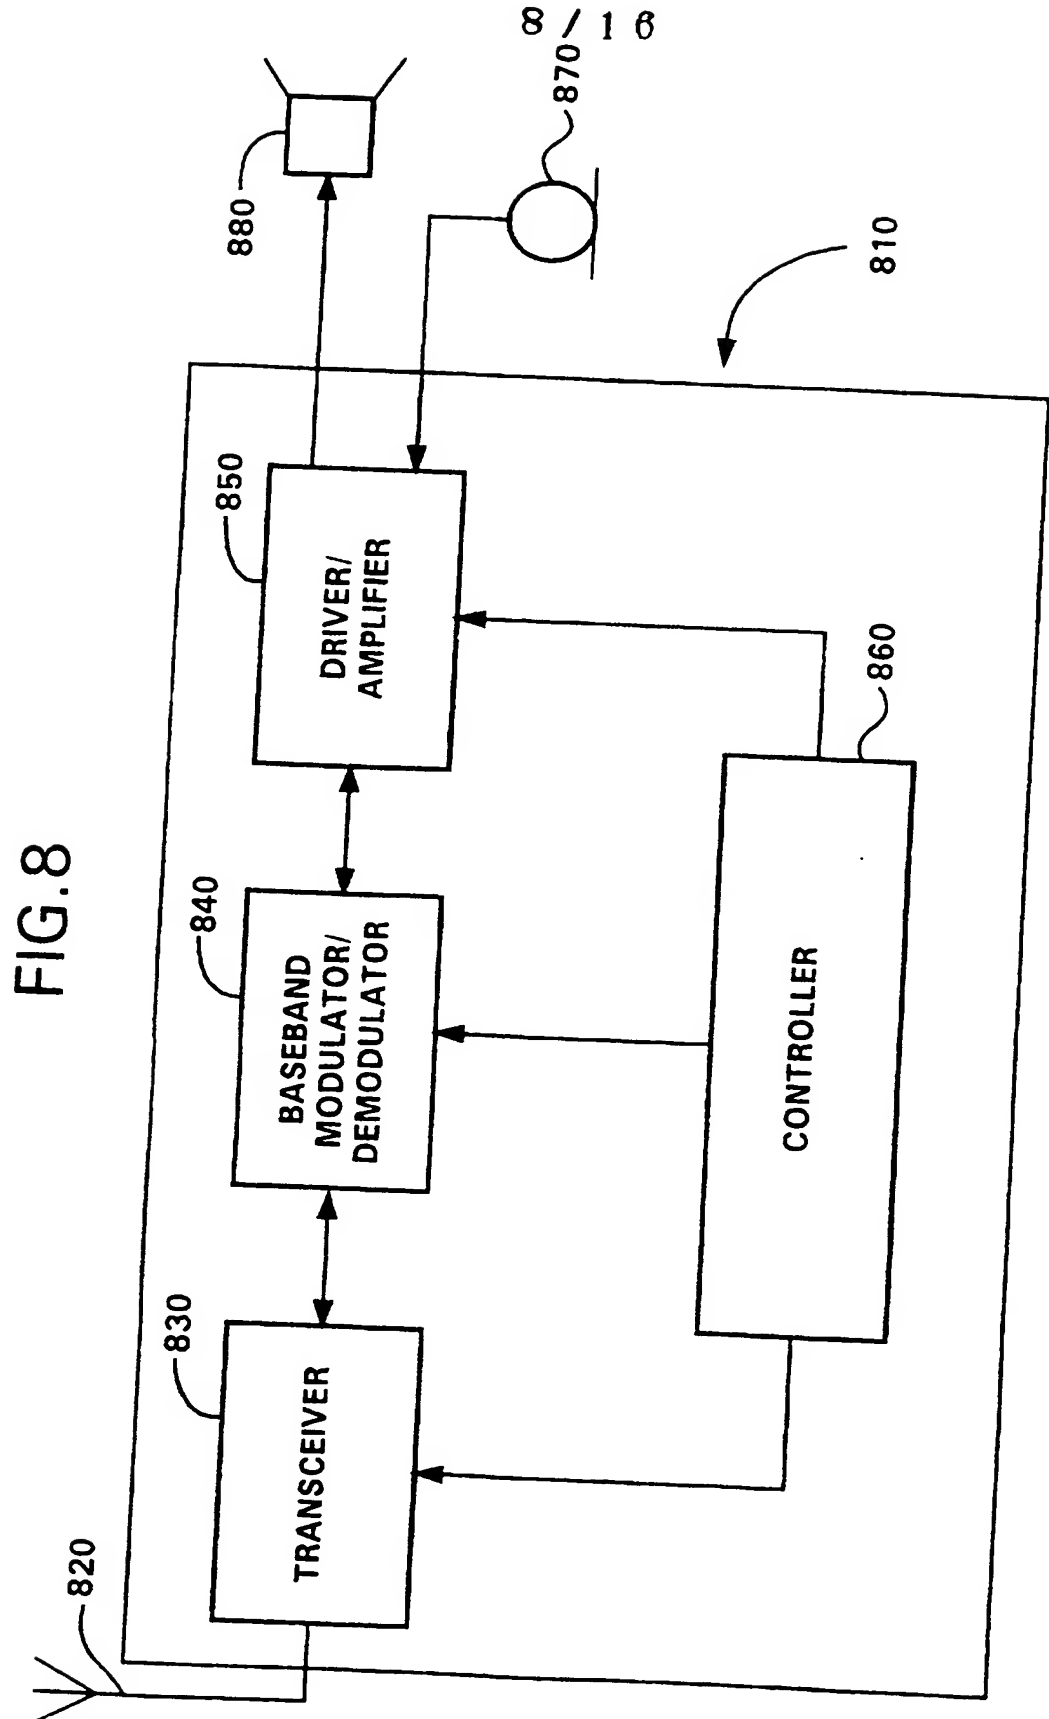FIG. 9A

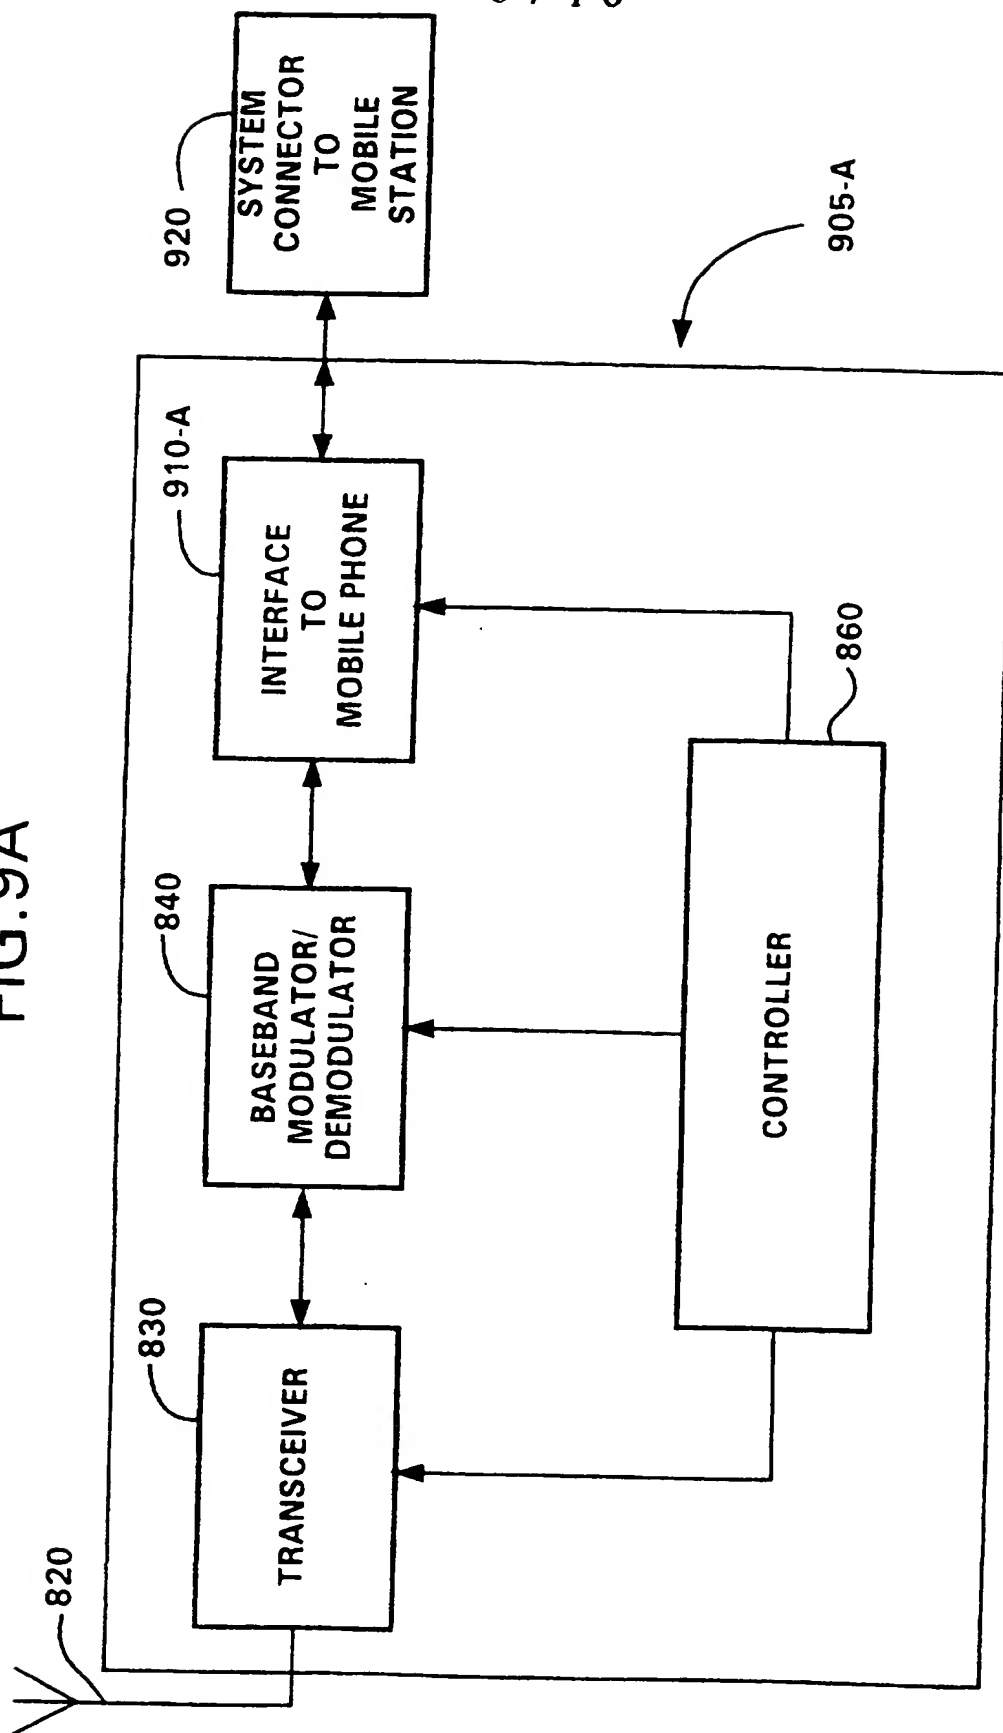


10 / 16

FIG. 9B

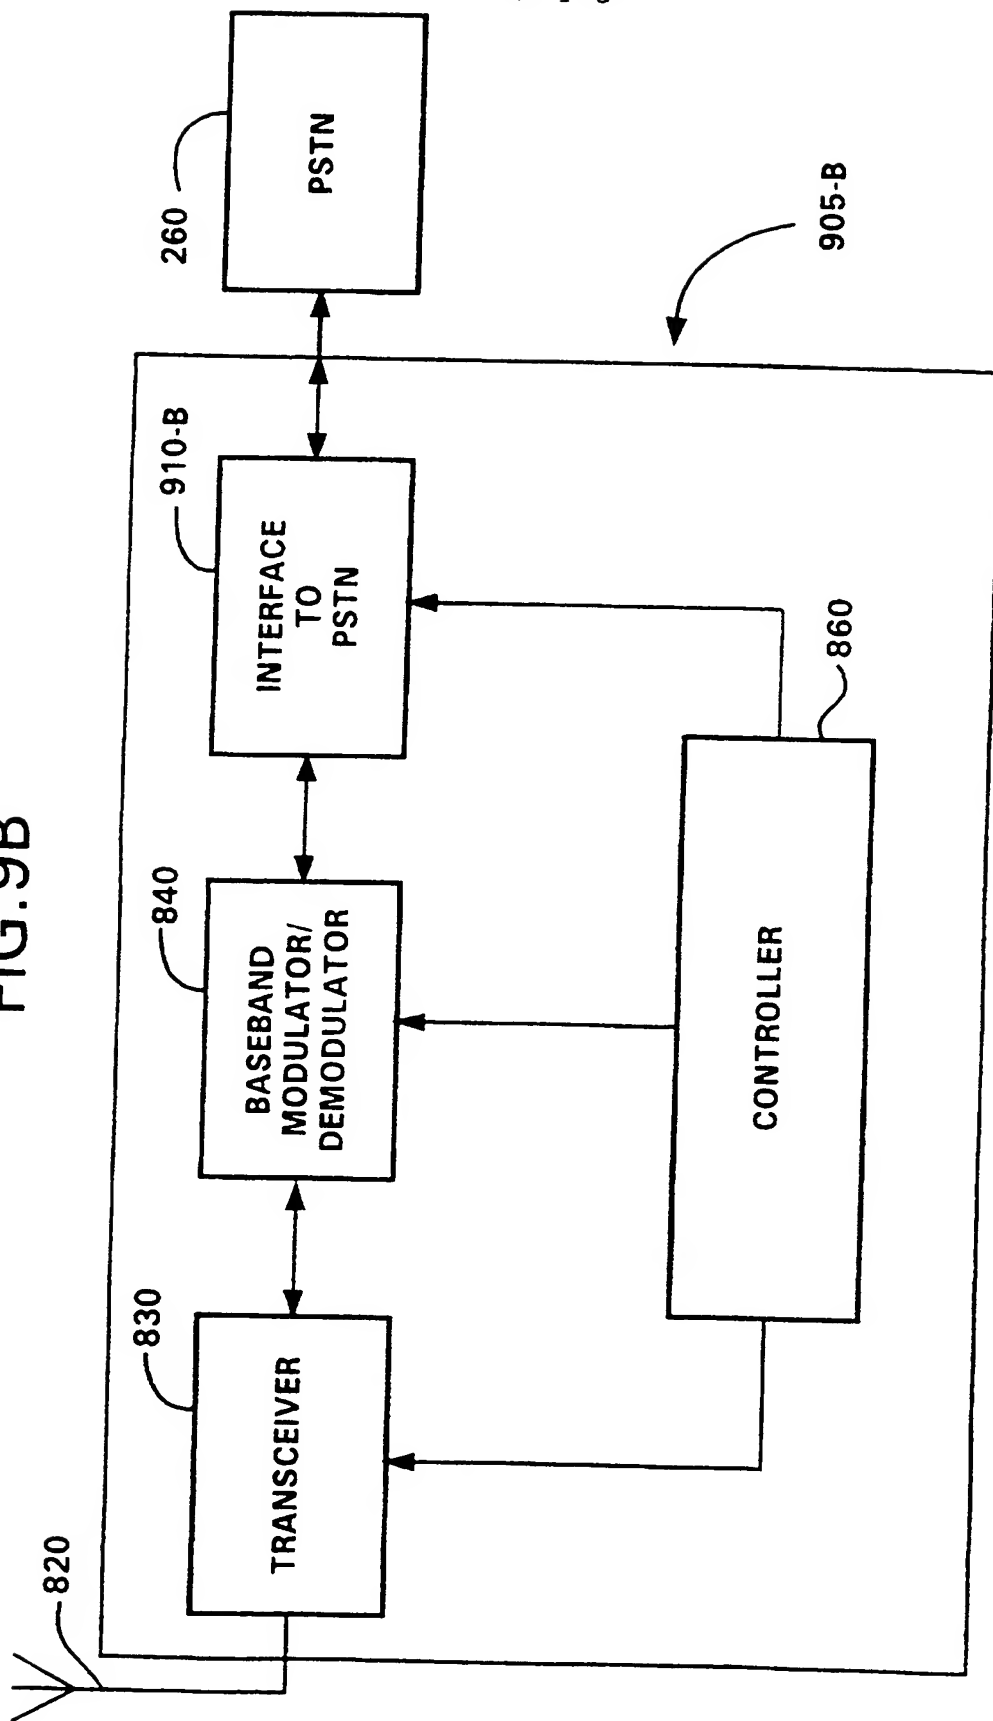


11 / 16

FIG. 9C

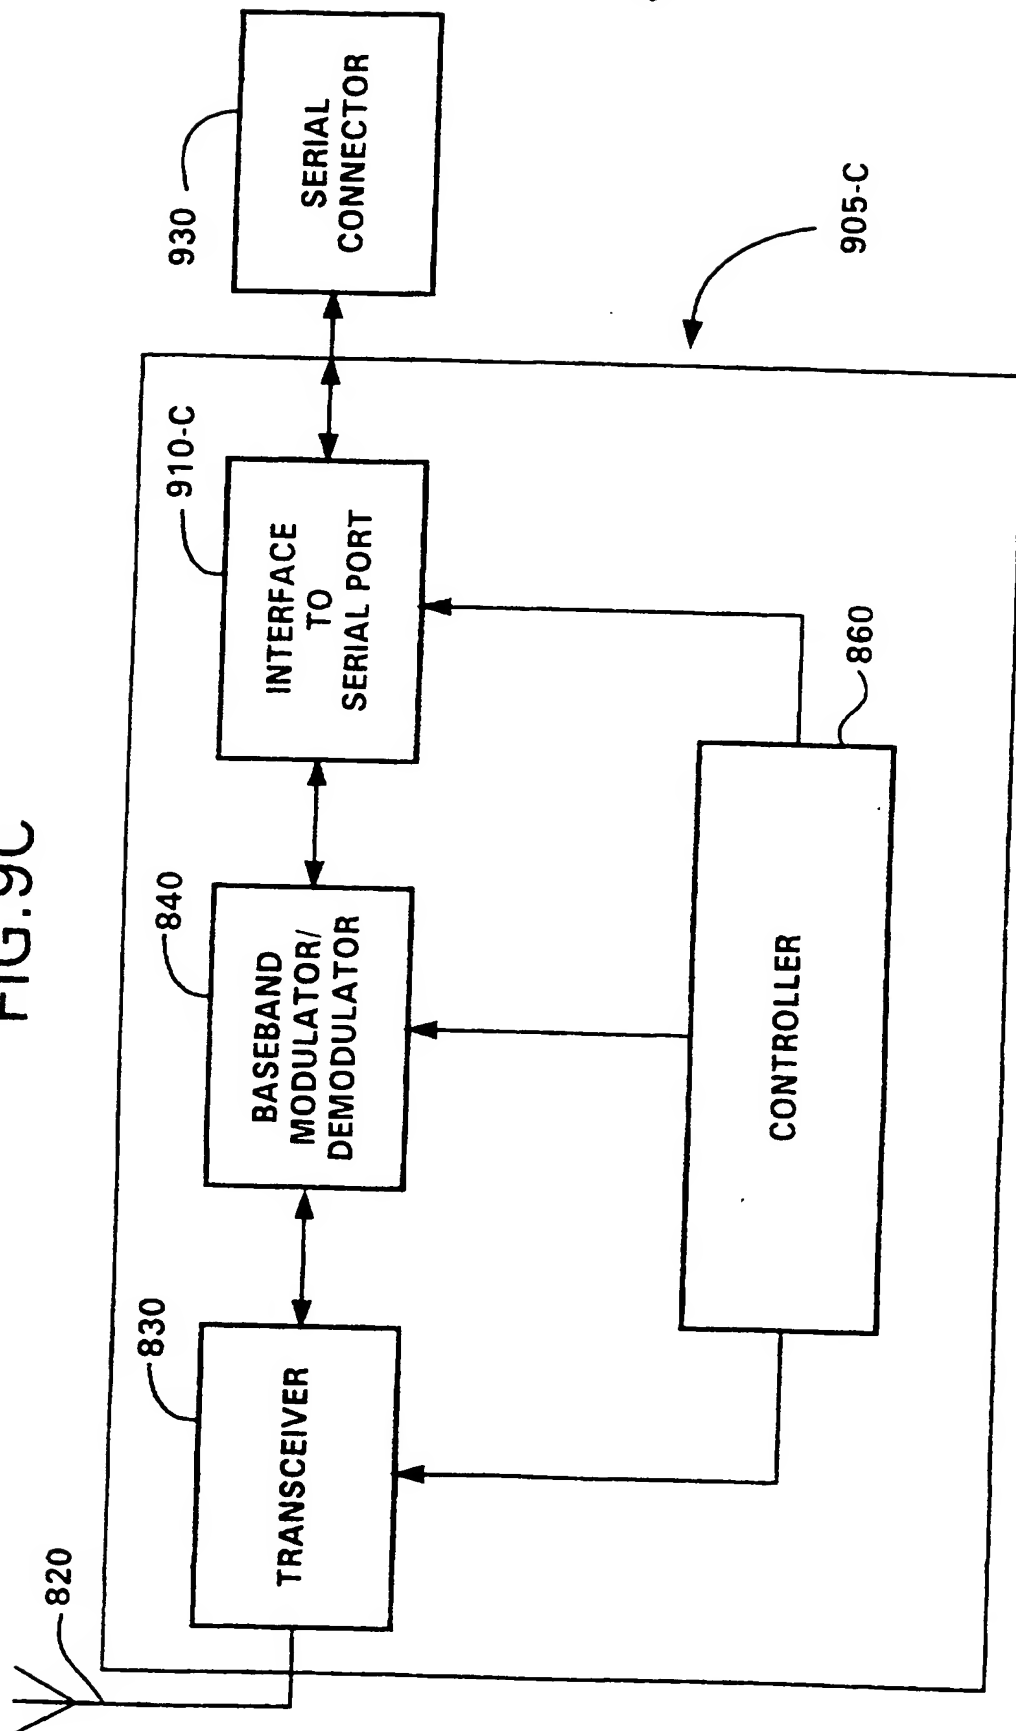

12 / 16


FIG. 9D

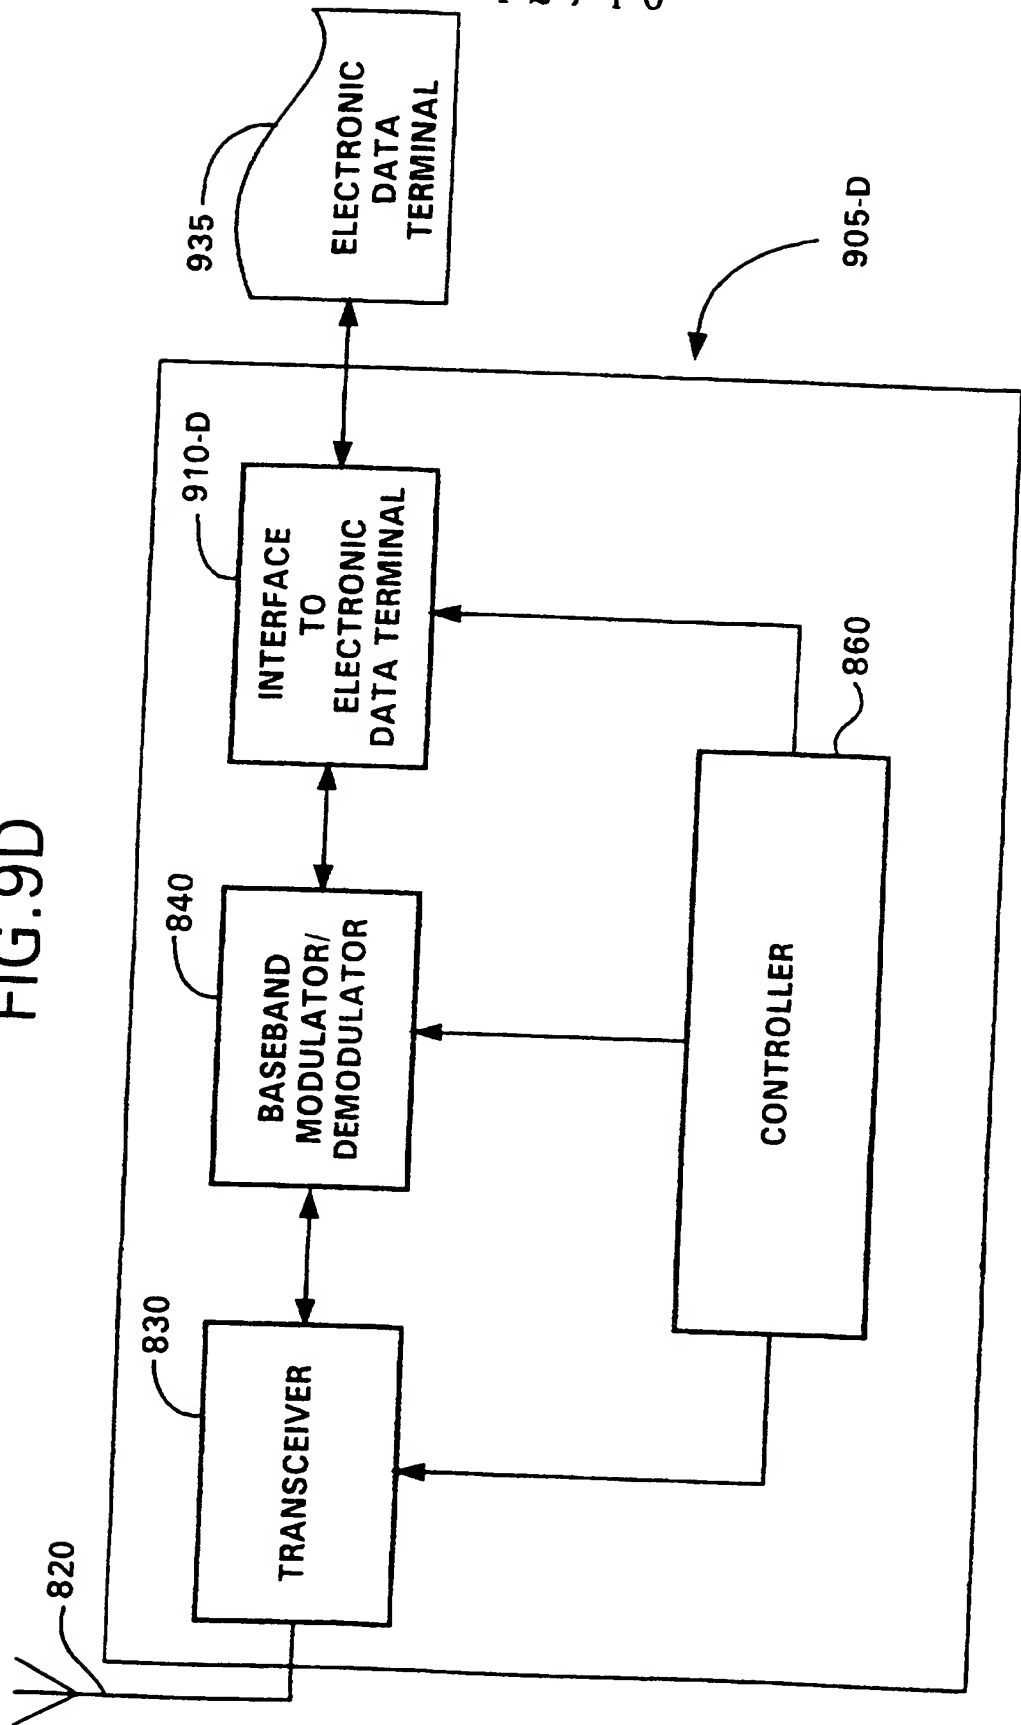




13 / 16

FIG. 9E

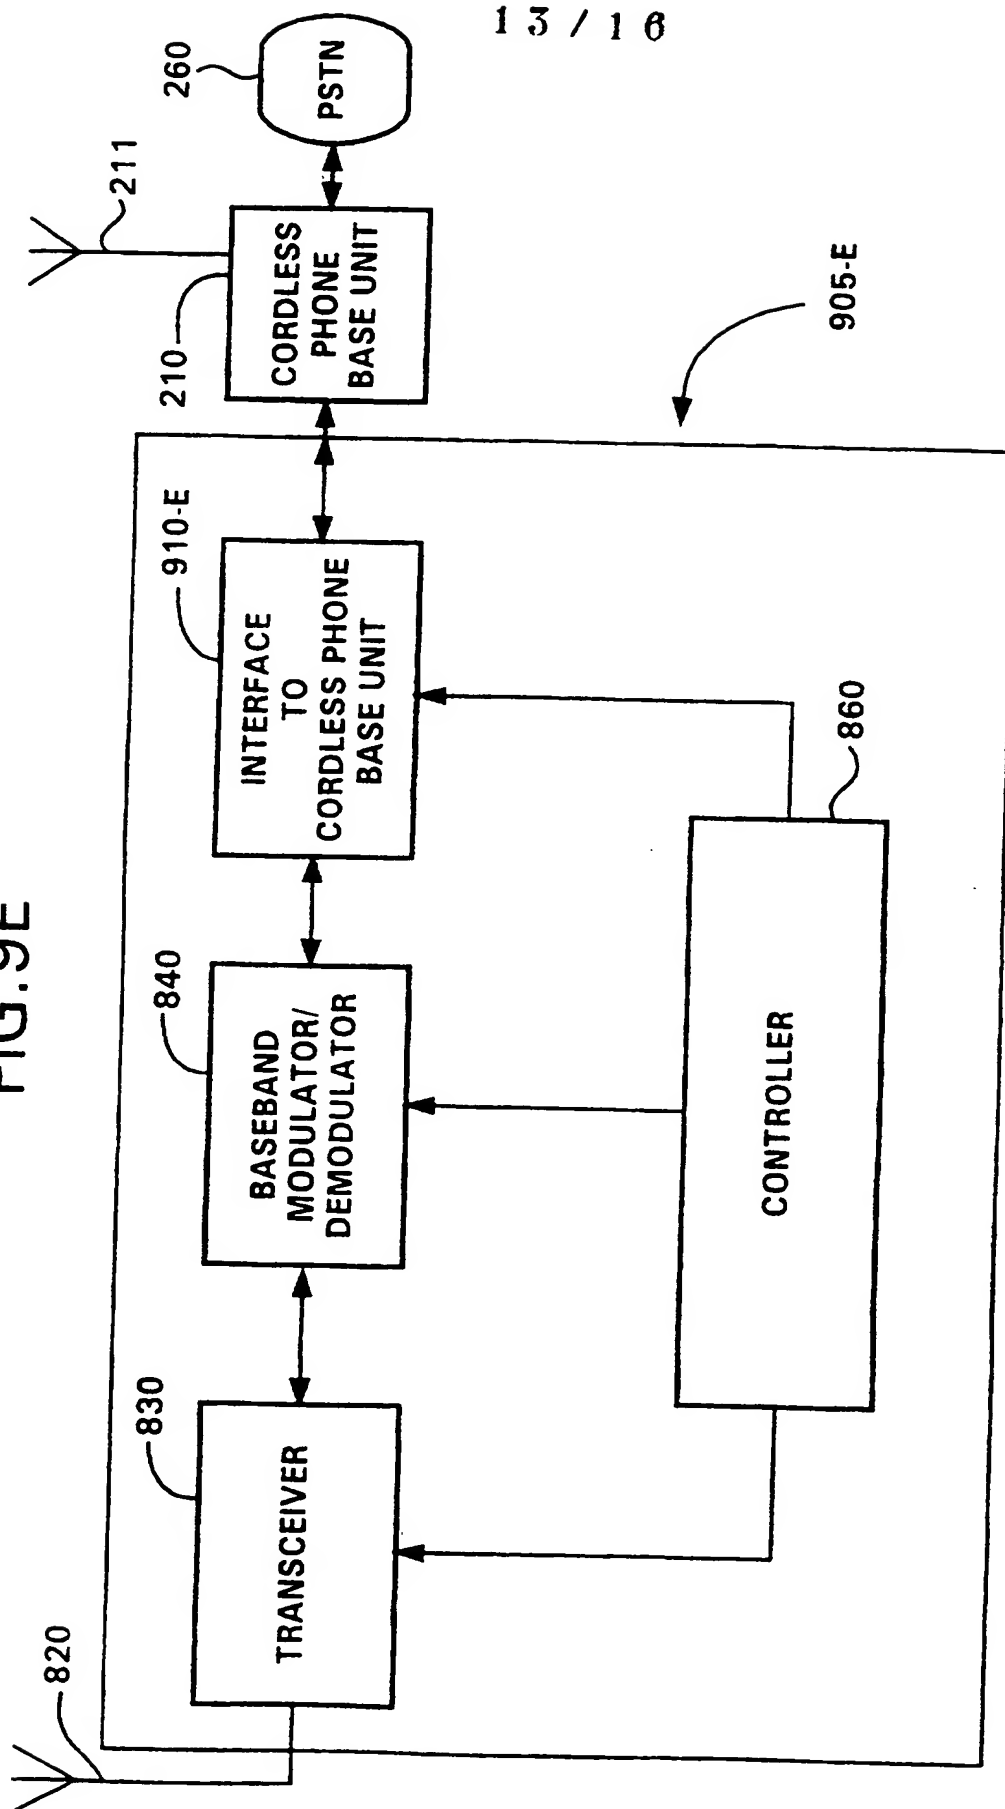


14 / 16

FIG. 10

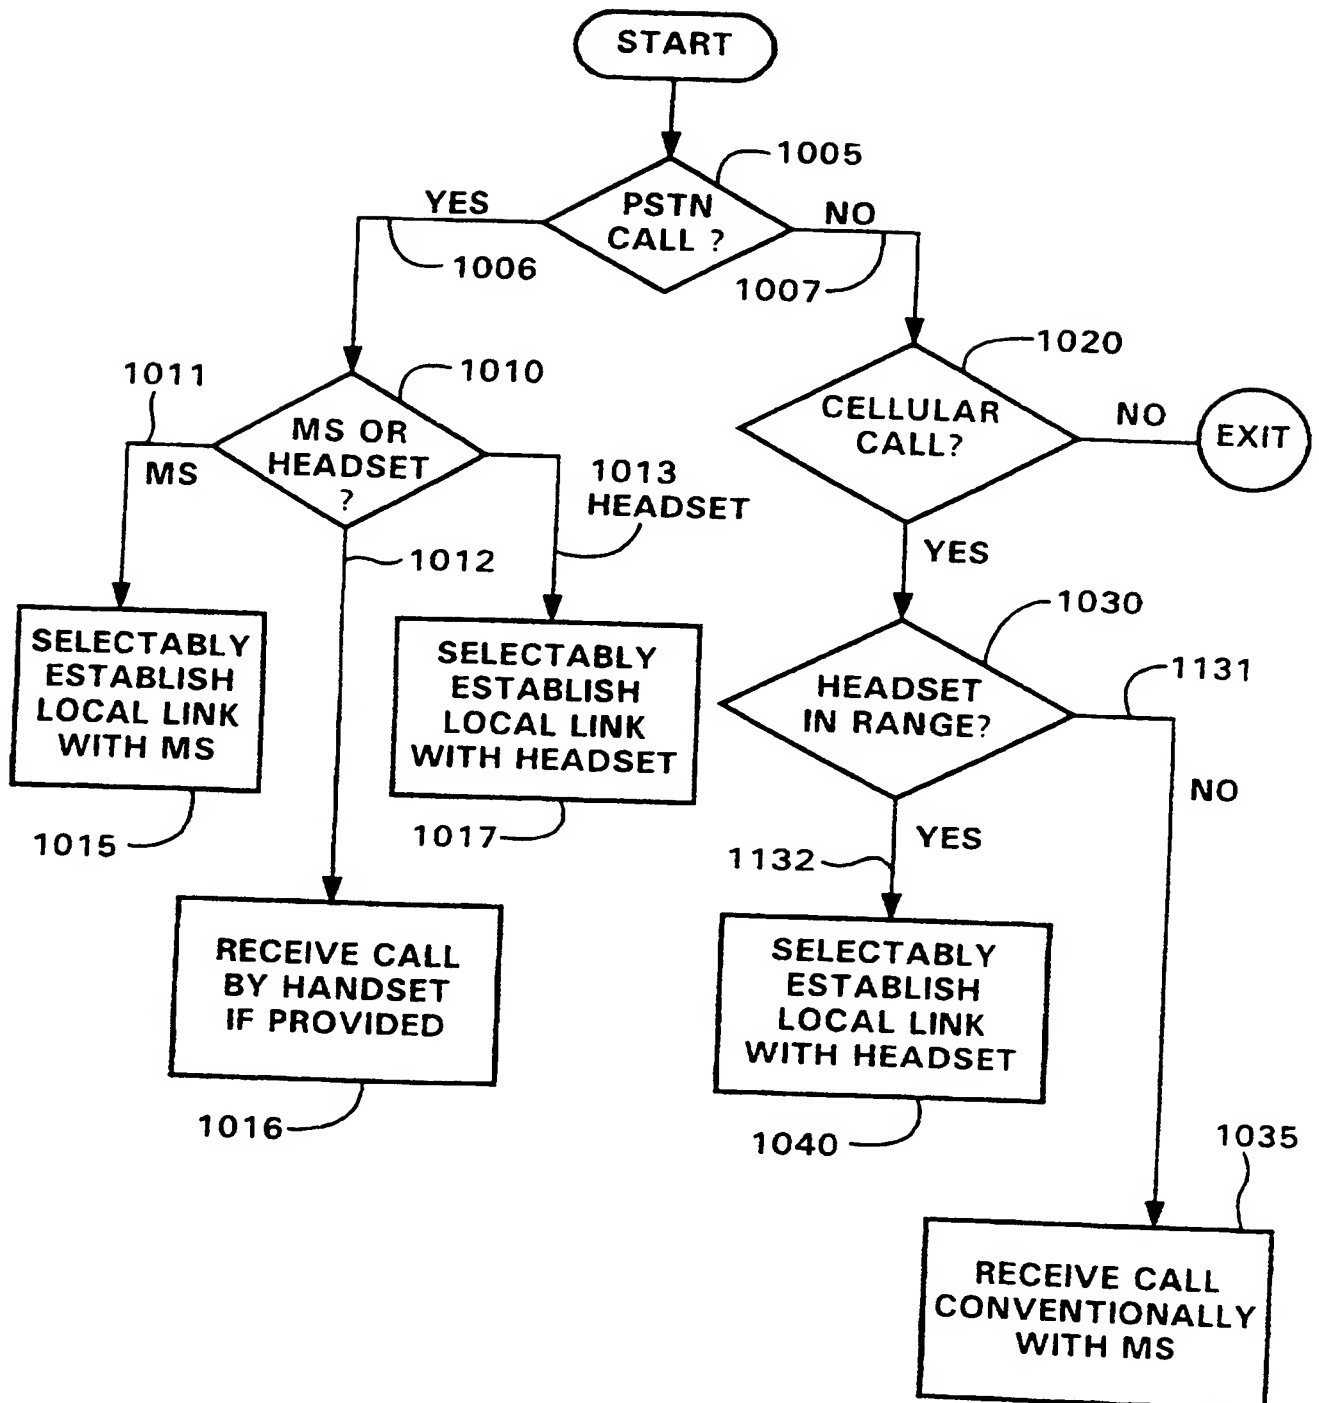


15 / 16

FIG. 11A

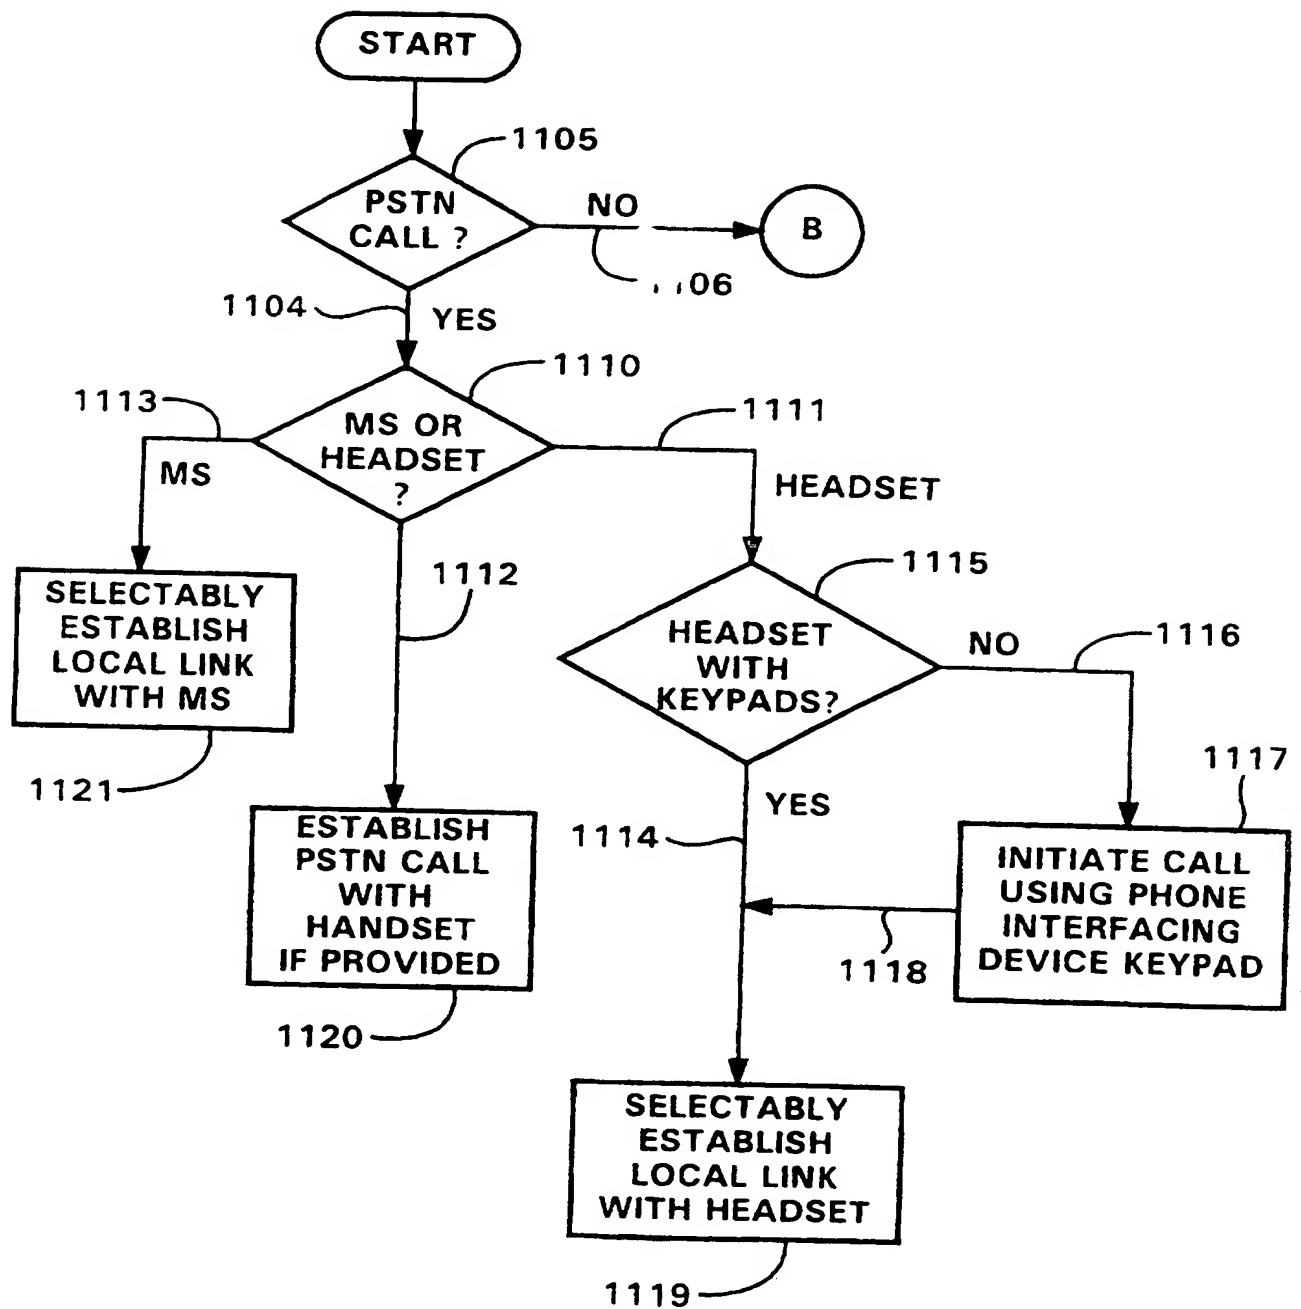

16 / 16

FIG. 11B

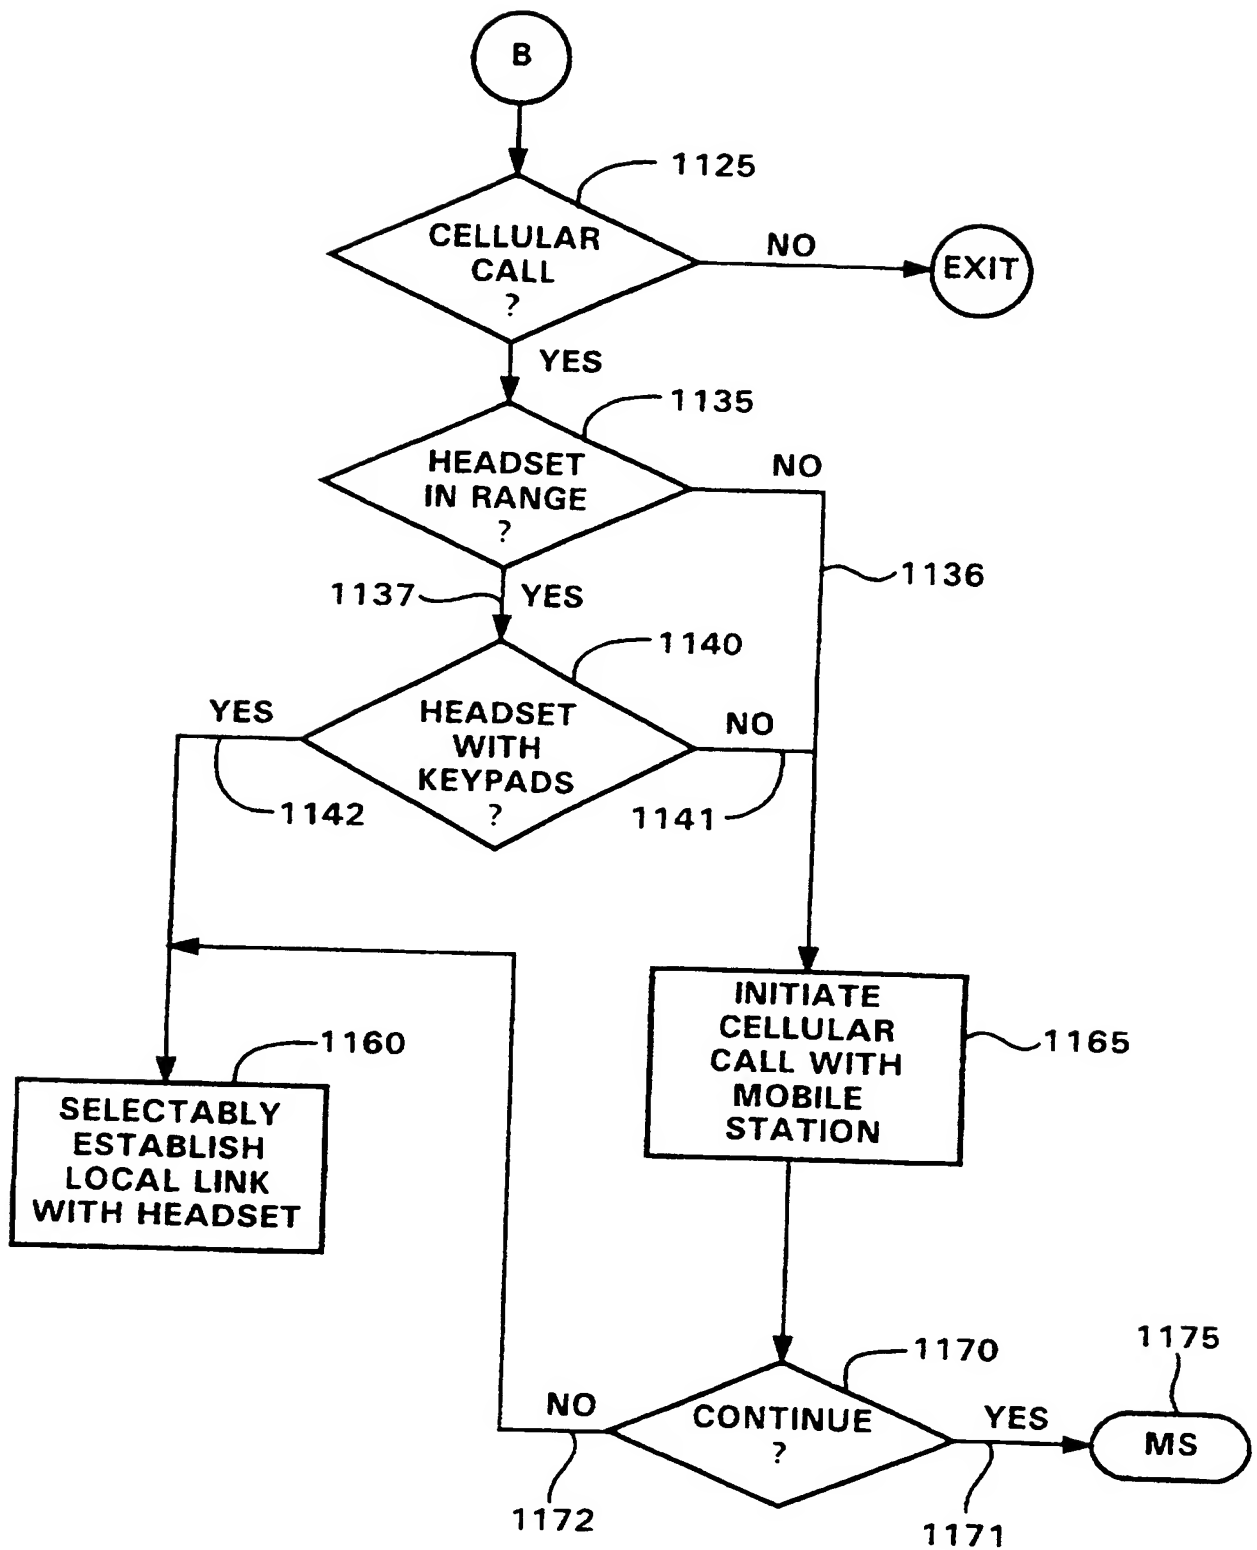

# INTERNATIONAL SEARCH REPORT

Internat. Application No  
PCT/SE 97/00366

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H04M1/72 H04Q7/32 H04L12/28

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 H04M H04Q H04L H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 669 773 A (SIEMENS AG) 30 August 1995	1,4,5,8, 10,11, 14,15, 17,18, 20, 34-37, 40,41, 43,46,48 2,25-33
A	see column 5, line 20 - column 11, line 51; figures 1-4	
X	EP 0 669 746 A (SIEMENS AG) 30 August 1995	1,3,8,9, 17, 34-37, 40,43, 46-48 2,25-33
A	see column 2, line 5 - column 8, line 5; figures 1-3	
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

4 July 1997

Date of mailing of the international search report

18.07.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Delangue, P

# INTERNATIONAL SEARCH REPORT

Internat. Application No  
PCT/SE 97/00366

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 43 23 144 A (DIEHL GMBH & CO) 19 January 1995  see the whole document ---	1,2,8, 14, 25-27, 31, 34-36, 40,46-48
X	EP 0 577 296 A (AMERICAN TELEPHONE & TELEGRAPH) 5 January 1994	1,7, 10-12, 21,23, 35, 37-39, 44,45
A	see column 3, line 15 - column 6, line 56; figures 1-4 ---	2,25-27, 31
A	WO 95 29566 A (PHONEX CORP) 2 November 1995  see page 5, line 19 - page 7, line 27; figures 1-3 see page 9, line 3 - page 10, line 13; figures 2,3 ---	1,2,4-6, 8,10-12, 14, 25-27,31
A	WO 91 08629 A (MOTOROLA INC) 13 June 1991  see page 4, line 5 - page 8, line 29; figure 1 ---	1,4-6,8, 10-12, 14,15,18
A	WO 95 01070 A (TELEFONAKTIEBOLAGET LM ERICSSON) 5 January 1995 see page 10, line 35 - page 13, line 10; figures 1,2 see page 20, line 1 - page 29, line 6-17 ---	1,34,35, 55
A	EP 0 684 714 A (MATSUSHITA ELECTRIC WORKS LTD) 29 November 1995 see column 4, line 55 - column 8, line 29; figures 1-5 -----	1,34,35

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Internat Application No  
PCT/SE 97/00366

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0669773 A	30-08-95	DE 4406505 A	31-08-95
EP 0669746 A	30-08-95	DE 4406507 A	31-08-95
		AT 154186 T	15-06-97
DE 4323144 A	19-01-95	NONE	
EP 0577296 A	05-01-94	JP 6090275 A	29-03-94
		US 5426689 A	20-06-95
WO 9529566 A	02-11-95	AU 2204495 A	16-11-95
WO 9108629 A	13-06-91	AU 6904291 A	26-06-91
		CS 9005910 A	15-10-91
		EP 0505407 A	30-09-92
		JP 5503194 T	27-05-93
		KR 9604956 B	18-04-96
WO 9501070 A	05-01-95	AU 7089294 A	17-01-95
		CA 2163745 A	05-01-95
		CN 1126017 A	03-07-96
		EP 0705522 A	10-04-96
		FI 956144 A	20-12-95
		JP 8511925 T	10-12-96
		NO 955209 A	21-02-96
		SE 9302161 A	23-12-94
EP 684714 A	29-11-95	JP 7321797 A	08-12-95
		CA 2149740 A	21-11-95
		CN 1113641 A	20-12-95

**THIS PAGE BLANK (USPTO)**